


Anritsu envision : ensure

ShockLine™ Modular 2-Port Vector Network Analyzer

ME7868A

1 MHz to 43.5 GHz

2 Meters to 25+ Meters

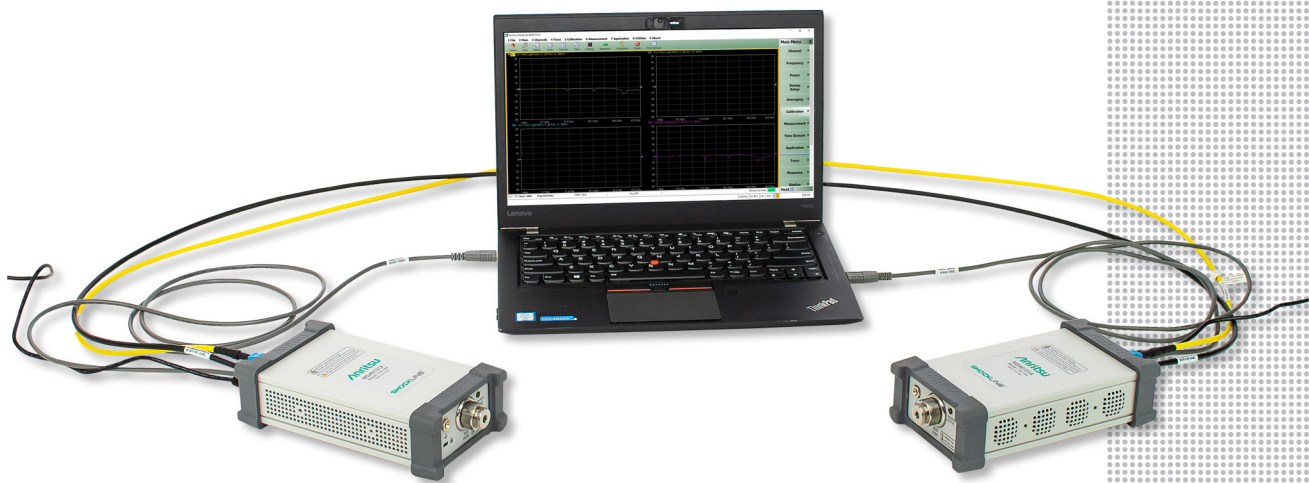

Introduction

The ME7868A is part of the ShockLine™ family of Vector Network Analyzers from Anritsu. It is a modular 2-port VNA consisting of two ShockLine MS46131A 1-port VNAs synchronized with PhaseLync™ technology. The ShockLine ME7868A 2-port VNA is available in three frequency ranges: 1 MHz to 8/20/43.5 GHz, and is capable of S-parameter and time domain measurements.

The two ShockLine MS46131A VNAs determine the instrument performance of the ME7868A as they become the test ports and provide the source and measurement capabilities for the 2-port VNA. The MS46131A is based on patented ShockLine VNA on chip technology, which simplifies the internal VNA architecture at high frequencies, reduces instrument cost and size, and enhances accuracy and measurement repeatability. This makes the 1-port VNA an ideal platform on which to create the distributed 2-port ME7868A VNA.

The patent-pending PhaseLync technology enables the two MS46131As to phase synchronize enabling the ME7868A to measure complex 2-port S-parameters on passive RF and Microwave devices. The MS46131A-012 PhaseLync option supports synchronization to distances of 100 meters or greater, enabling the ME7868A to simplify applications where vector transmission measurements over distance is required by bringing the VNA port to the DUT.

The ME7868A VNA uses USB communication to control both MS46131A VNAs from an external PC. ShockLine software runs the ME7868A as well as the rest of the ShockLine family of VNAs providing a powerful graphical user interface for debugging and manual testing of devices. The software also provides a common command syntax that is compatible across the entire ShockLine VNA lineup for comprehensive remote control programming.

This document provides detailed specifications for the ME7868A series Vector Network Analyzers and related options.

Models and Operating Frequencies

2 Meter

ME7868A-010-2: 1 MHz to 8 GHz

ME7868A-020-2: 1 MHz to 20 GHz

ME7868A-043-2: 1 MHz to 43.5 GHz

5 Meter

ME7868A-010-5: 1 MHz to 8 GHz

ME7868A-020-5: 1 MHz to 20 GHz

ME7868A-043-5: 1 MHz to 43.5 GHz

25 Meter

ME7868A-010-25: 1 MHz to 8 GHz

ME7868A-020-25: 1 MHz to 20 GHz

ME7868A-043-25: 1 MHz to 43.5 GHz

For distances > 25 meters, please contact the factory.

Table of Contents

Definitions 4

System Dynamic Range 5

High Level Noise — 1-Port MS46131A-010 5

High Level Noise — 1-Port MS46131A-020/043 5

High Level Noise — 2-Port 5

Receiver Compression Levels 5

Output Power Settings 5

Measurement Stability — 1-Port 5

Measurement Stability — 2-Port 5

Frequency Resolution, Accuracy, and Stability 6

Uncorrected (Raw) Port Characteristics 6

MS46131A-010 VNA System Performance with Manual Cal Kits 7

MS46131A-020 VNA System Performance with Manual Cal Kits 8

MS46131A-043 VNA System Performance with Manual Cal Kits 9

MS46131A-043 VNA System Performance with Manual Cal Kits 10

MS46131A-010 VNA System Performance with SmartCal™ 11

MS46131A-010 VNA System Performance with SmartCal™ 12

MS46131A-010, MS46131A-020 VNA System Performance with SmartCal™ 13

MS46131A-010, MS46131A-020 VNA System Performance with SmartCal™ 14

MS46131A-043 VNA System Performance with Precision AutoCal™ 15

Measurement Throughput. 15

Standard Capabilities 16

Calibration and Correction Capabilities 18

Optional Capabilities 18

Remote Operability 18

Standard Device Connections 19

Recommended External PC Configuration 23

Regulatory Compliance. 23

Environmental 23

Warranty 23

Ordering Information 24

Definitions

| | |
|----------------------------------|---|
| | All specifications and characteristics apply under the following conditions, unless otherwise stated. ME7868A 2-port VNA consisting of: |
| | <ul style="list-style-type: none"> • Two MS46131A, Base model, revision 2 • MS46131A-012, PhaseLync synchronization option, revision 1, installed on both MS46131A 1-port VNAs. |
| Warm-Up Time | After 60 minutes of warm-up time, where the instrument is left in the ON state. |
| Temperature Range | Over the 25 °C ± 5 °C temperature range. |
| Error-Corrected Specifications | Specifications are valid over 23 °C ± 3 °C, with < 1 °C variation from calibration temperature. Error-corrected specifications are warranted and include guard-bands, unless otherwise stated. |
| Frequency Bands in Tables | When a frequency is listed in two rows of the same table, the specification for the common frequency is taken from the lower frequency band. |
| User Cables | Specifications do not include effects of any user cables attached to the instrument. |
| Discrete Spurious Responses | Specifications may exclude discrete spurious responses. |
| Internal Reference Signal | All specifications apply with the internal 10 MHz frequency reference. |
| Interpolation Mode | All specifications are with Interpolation Mode Off. |
| Typical Performance | Typical performance indicates the measured performance of an average unit. It does not include guard-bands and is not covered by the product warranty. Typical specifications are shown in parenthesis, such as (-102 dB), or noted as Typical. |
| Characteristic Performance | Characteristic performance indicates a performance designed-in and verified during the design phase. It is not covered by the product warranty. |
| Transmission Performance | All transmission specifications (requiring option 012) are tested with a 2 meter PhaseLync cable. These specifications may be interpreted as typical values for longer PhaseLync cable lengths. |
| Recommended Calibration Cycle | 12 months (Residual specifications also require calibration kit calibration cycle adherence.) |
| Instrument Grounding | For optimum performance and ESD protection, the AC power cord to the external power supply should be plugged into a AC socket with a ground. If this is not possible, the ground receptacle on the MS46131A can be used to ground the chassis. |
| Specifications Subject to Change | All specifications subject to change without notice. For the most current data sheet, please visit the Anritsu web site: www.anritsu.com |

The instrument may be protected by one or more of the following patents: 6894581, 7088111, 7545151, 7683633, 7924024, 8417189, 8718586, 10116432, 9967085, 9964585, 9860054, 9733289, and 9366707, depending upon the model and option configuration of the instrument.

System Dynamic Range

System dynamic range for an ME7868A, consisting of two MS46131A VNAs with the PhaseLync option, is calculated as the difference between High source power and the noise floor (RMS) at the specified reference plane at 10 Hz IF Bandwidth with an isolation calibration. High isolation mode is used.

| Frequency Range | All Configurations (dB) |
|----------------------|---------------------------------|
| 1 MHz to 5 GHz | 97 (110 typical) |
| > 5 GHz to 8.5 GHz | 97 ^{a,b} (105 typical) |
| > 8.5 GHz to 20 GHz | 98 (110 typical) |
| > 20 GHz to 40 GHz | 102 (110 typical) |
| > 40 GHz to 43.5 GHz | 99 (110 typical) |

a. For the port that is not providing the master reference the SDR will degrade as follows: > 5 GHz to 7 GHz: 89 (105 typical)

b. Dynamic range maybe degraded in a narrow range near 8 GHz in -020 and -043 models due to receiver residuals.

High Level Noise — 1-Port MS46131A-010

Measured at 100 Hz IF bandwidth and at High power level, RMS.

| Frequency | Magnitude (dB) | Phase (deg) |
|----------------|-----------------------|---------------------|
| 1 MHz to 8 GHz | 0.009 (0.003 typical) | 0.12 (0.03 typical) |

High Level Noise — 1-Port MS46131A-020/043

Measured at 100 Hz IF bandwidth and at High power level, RMS.

| Frequency | Magnitude (dB) | Phase (deg) |
|----------------------|-----------------------|---------------------|
| 1 MHz to 6 GHz | 0.009 (0.003 typical) | 0.12 (0.03 typical) |
| > 6 GHz to 8 GHz | 0.022 (0.01 typical) | 0.15 (0.08 typical) |
| > 8 GHz to 40 GHz | 0.006 (0.001 typical) | 0.1 (0.02 typical) |
| > 40 GHz to 43.5 GHz | 0.009 (0.002 typical) | 0.12 (0.03 typical) |

High Level Noise — 2-Port

Measured at 100 Hz IF bandwidth and at High power level, RMS exclusive of drift. Requires PhaseLync option on both MS46131A VNAs. High Isolation Mode off.

| Frequency | Magnitude (dB) | Phase (deg) |
|----------------------|------------------------|---------------------|
| 1 MHz to 4GHz | 0.007 (0.0015 typical) | 0.21 (0.02 typical) |
| > 4 GHz to 8 GHz | 0.011 (0.003 typical) | 0.41 (0.08 typical) |
| > 8 GHz to 20 GHz | 0.006 (0.0015 typical) | 0.41 (0.08 typical) |
| > 20 GHz to 43.5 GHz | 0.011 (0.0025 typical) | 0.56 (0.25 typical) |

Receiver Compression Levels

Port power level beyond which the response may be compressed more than 0.1 dB. Performance is typical.

| Frequency Range | All Configurations (dBm) |
|-------------------|--------------------------|
| 1 MHz to 43.5 GHz | + 5 |

Output Power Settings

Performance is typical.

| Power Setting | All Configurations |
|----------------|--------------------|
| High (default) | 0 dBm ±2dB |
| Low | - 20 dBm ±2dB |

Measurement Stability — 1-Port

Performance is typical.

| Frequency | Magnitude (dB/°C) | Phase (deg/°C) |
|-------------------|-------------------|----------------|
| 1 MHz to 43.5 GHz | 0.02 | 0.3 |

Measurement Stability — 2-Port

Ratioed transmission measurement at default power with an electrically short thru in place over the normal specified temperature range and a 15 m PhaseLync interconnect (values approximately scale with length of the interconnect). Measured with both modules and interconnect in the same environment. Larger values may be obtained with a temperature differential between modules. Performance is typical.

| Frequency | Magnitude (dB/°C) | Phase (deg/°C) |
|----------------------|-------------------|----------------|
| 1 MHz to 8 GHz | 0.015 | 0.3 |
| > 8 GHz to 20 GHz | 0.015 | 0.5 |
| > 20 GHz to 43.5 GHz | 0.02 | 0.8 |

Frequency Resolution, Accuracy, and Stability

| Resolution | Accuracy | Stability | Aging |
|------------|---------------------------------------|--|-------------------------|
| 1 Hz | ± 1.0 ppm (at time of calibration) | ± 1.0 ppm from -10 °C to +55 °C, typical | ± 1.0 ppm/year, typical |

Uncorrected (Raw) Port Characteristics

User and System Correction Off. All specifications are typical.

| Frequency Range | Directivity (dB) | Port Match (dB) |
|---------------------|------------------|-----------------|
| 1 MHz to 6 GHz | > 6 | > 6 |
| > 6 GHz to 8 GHz | > 5 | > 6 |
| > 8 GHz to 43.5 GHz | > 10 | > 10 |

MS46131A-010 VNA System Performance with Manual Cal Kits

Error-Corrected Specifications


With calibration using TOSLN50A-8 or TOSLNF50A-8 N type connector calibration kits.

| Frequency Range | Directivity (dB) | Source Match (dB) | Load Match ^a (dB) | Reflection Tracking ^a (dB) | Transmission Tracking ^a (dB) |
|------------------|------------------|-------------------|------------------------------|---------------------------------------|---|
| 1 MHz to 6 GHz | ≥ 42 | ≥ 33 | ≥ 41 | ± 0.15 | ±0.06 |
| > 6 GHz to 8 GHz | ≥ 37 | ≥ 33 | ≥ 36 | ± 0.15 | ±0.06 |

a. Characteristic performance.

Measurement Uncertainties

The graphs give measurement uncertainties after the above error-corrected calibration. The errors are a worst-case contribution of residual directivity, load and source match, frequency response and isolation, network analyzer dynamic accuracy, and connector repeatability. 10 Hz IF Bandwidth is used. For transmission uncertainties, it is assumed that $S_{11} = S_{22} = 0$. A nominal amount of time drift is included in the computation as is consistent with the use of phase compensation mode. Without phase compensation, uncertainties hold, but for a shorter amount of time/temperature change after calibration. For reflection uncertainties, it is assumed that $S_{21} = S_{12} = 0$. All calibrations and measurements were performed at default port power. For other conditions, please use our free Exact Uncertainty Calculator software, available for download from the Anritsu web site at www.anritsu.com.

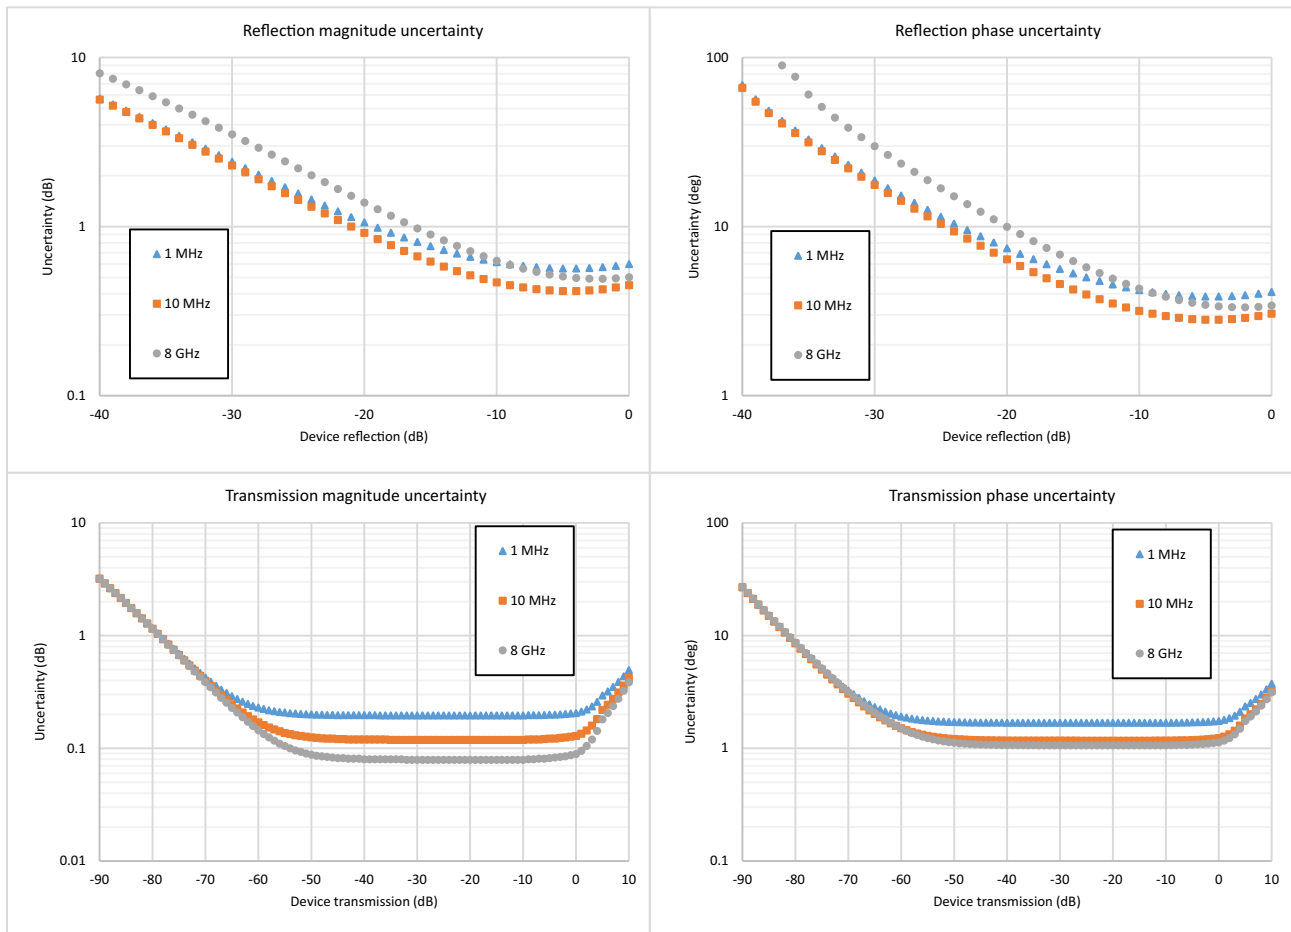

MS46131A-020 VNA System Performance with Manual Cal Kits

Error-Corrected Specifications


With calibration using the TOSLK50A-20 or TOSLKF50A-20 K type connector calibration kits.

| Frequency Range | Directivity (dB) | Source Match (dB) | Load Match ^a (dB) | Reflection Tracking ^a (dB) | Transmission Tracking ^a (dB) |
|--------------------|------------------|-------------------|------------------------------|---------------------------------------|---|
| 1 MHz to 10 GHz | ≥ 42 | ≥ 33 | ≥ 41 | ± 0.15 | ±0.06 |
| > 10 GHz to 20 GHz | ≥ 36 | ≥ 26 | ≥ 35 | ± 0.15 | ±0.06 |

a. Characteristic performance.

Measurement Uncertainties

The graphs give measurement uncertainties after the above error-corrected calibration. The errors are a worst-case contribution of residual directivity, load and source match, frequency response and isolation, network analyzer dynamic accuracy, and connector repeatability. 10 Hz IF Bandwidth is used. For transmission uncertainties, it is assumed that $S_{11} = S_{22} = 0$. A nominal amount of time drift is included in the computation as is consistent with the use of phase compensation mode. Without phase compensation, uncertainties hold, but for a shorter amount of time/temperature change after calibration. For reflection uncertainties, it is assumed that $S_{21} = S_{12} = 0$. All calibrations and measurements were performed at default port power. For other conditions, please use our free Exact Uncertainty Calculator software, available for download from the Anritsu web site at www.anritsu.com.

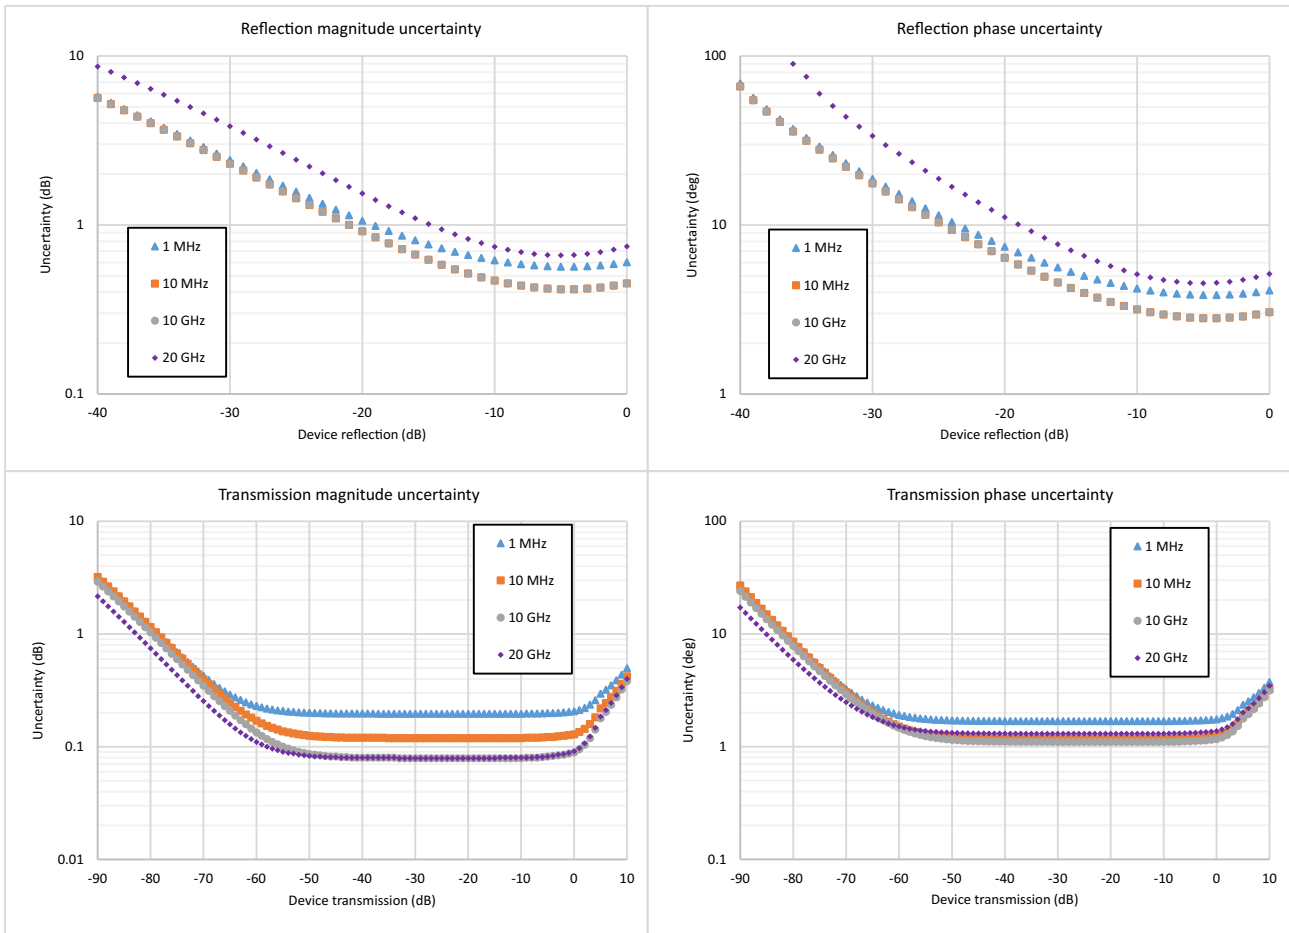

MS46131A-043 VNA System Performance with Manual Cal Kits

Error-Corrected Specifications


With calibration using TOSLK50A-43.5 or TOSLKF50A-43.5 K type connector calibration kits with generic calibration coefficients.

| Frequency Range | Directivity (dB) | Source Match (dB) | Load Match ^a (dB) | Reflection Tracking ^a (dB) | Transmission Tracking ^a (dB) |
|----------------------|------------------|-------------------|------------------------------|---------------------------------------|---|
| 1 MHz to 10 GHz | ≥ 42 | ≥ 33 | ≥ 41 | ± 0.15 | ±0.06 |
| > 10 GHz to 20 GHz | ≥ 36 | ≥ 26 | ≥ 35 | ± 0.15 | ±0.06 |
| > 20 GHz to 30 GHz | ≥ 32 | ≥ 22 | ≥ 31 | ± 0.15 | ±0.06 |
| > 30 GHz to 40 GHz | ≥ 30 | ≥ 20 | ≥ 29 | ± 0.15 | ±0.06 |
| > 40 GHz to 43.5 GHz | ≥ 28 | ≥ 20 | ≥ 27 | ± 0.2 | ±0.16 |

a. Characteristic performance.

Measurement Uncertainties

The graphs give measurement uncertainties after the above error-corrected calibration. The errors are a worst-case contribution of residual directivity, load and source match, frequency response and isolation, network analyzer dynamic accuracy, and connector repeatability. 10 Hz IF Bandwidth is used. For transmission uncertainties, it is assumed that $S_{11} = S_{22} = 0$. A nominal amount of time drift is included in the computation as is consistent with the use of phase compensation mode. Without phase compensation, uncertainties hold, but for a shorter amount of time/temperature change after calibration. For reflection uncertainties, it is assumed that $S_{21} = S_{12} = 0$. All calibrations and measurements were performed at default port power. For other conditions, please use our free Exact Uncertainty Calculator software, available for download from the Anritsu web site at www.anritsu.com.

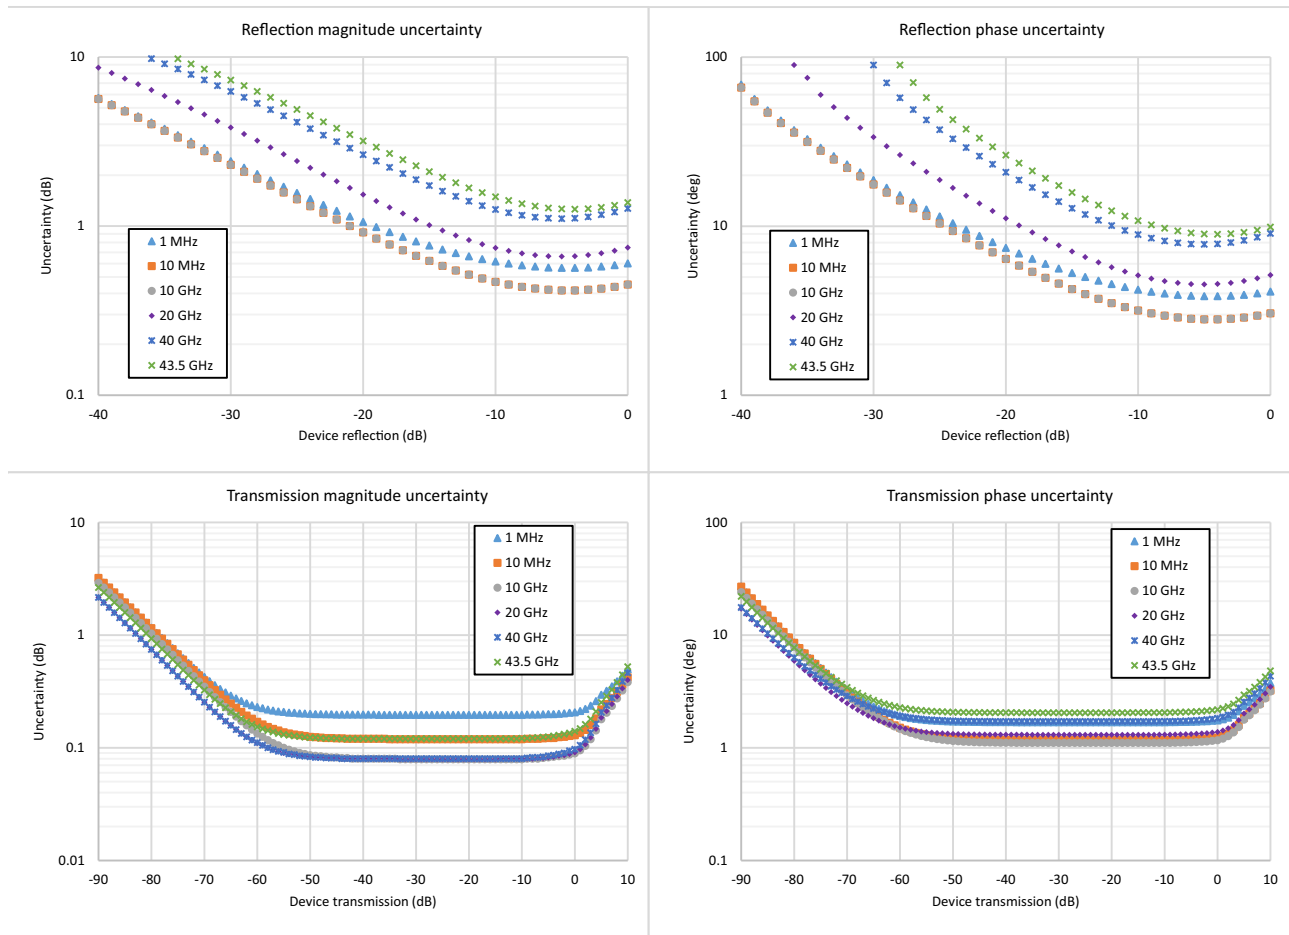

MS46131A-043 VNA System Performance with Manual Cal Kits

Error-Corrected Specifications


With calibration using TOSLK50A-43.5 or TOSLKF50A-43.5 K type connector calibration kits with .s1p definitions.

| Frequency Range | Directivity (dB) | Source Match (dB) | Load Match ^a (dB) | Reflection Tracking ^a (dB) | Transmission Tracking ^a (dB) |
|----------------------|------------------|-------------------|------------------------------|---------------------------------------|---|
| 1 MHz to 50 MHz | ≥ 45 | ≥ 45 | ≥ 44 | ± 0.15 | ±0.06 |
| > 0.05 GHz to 10 GHz | ≥ 45 | ≥ 45 | ≥ 44 | ± 0.15 | ±0.06 |
| > 10 GHz to 20 GHz | ≥ 45 | ≥ 45 | ≥ 44 | ± 0.15 | ±0.06 |
| > 20 GHz to 30 GHz | ≥ 45 | ≥ 44 | ≥ 44 | ± 0.15 | ±0.06 |
| > 30 GHz to 40 GHz | ≥ 45 | ≥ 42 | ≥ 44 | ± 0.15 | ±0.06 |
| > 40 GHz to 43.5 GHz | ≥ 42 | ≥ 41 | ≥ 41 | ± 0.2 | ±0.16 |

a. Characteristic performance.

Measurement Uncertainties

The graphs give measurement uncertainties after the above error-corrected calibration. The errors are a worst-case contribution of residual directivity, load and source match, frequency response and isolation, network analyzer dynamic accuracy, and connector repeatability. 10 Hz IF Bandwidth is used. For transmission uncertainties, it is assumed that $S_{11} = S_{22} = 0$. A nominal amount of time drift is included in the computation as is consistent with the use of phase compensation mode. Without phase compensation, uncertainties hold, but for a shorter amount of time/temperature change after calibration. For reflection uncertainties, it is assumed that $S_{21} = S_{12} = 0$. All calibrations and measurements were performed at default port power. For other conditions, please use our free Exact Uncertainty Calculator software, available for download from the Anritsu web site at www.anritsu.com.

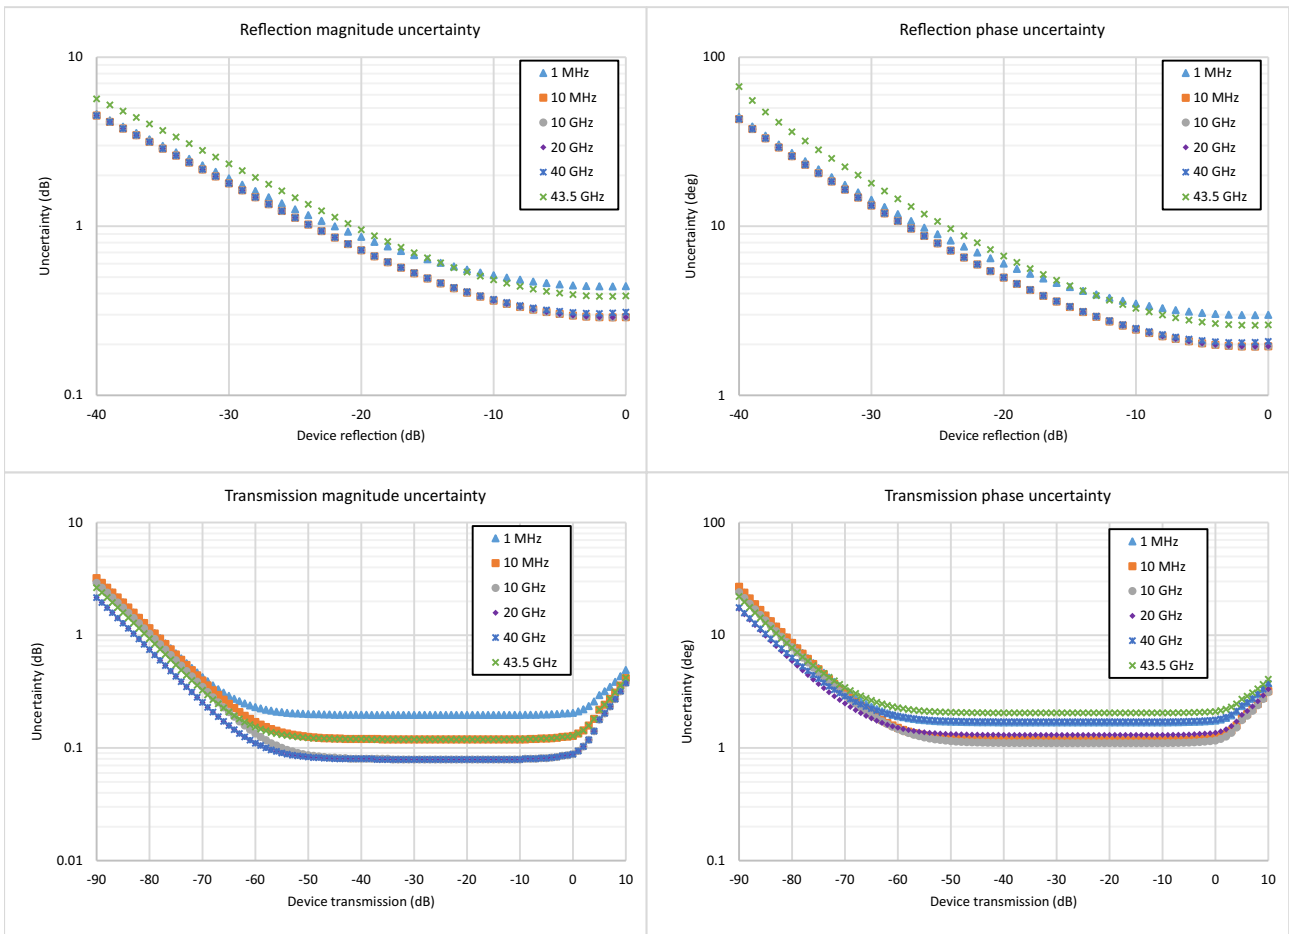

MS46131A-010 VNA System Performance with SmartCal™

Error-Corrected Specifications


With calibration using the 2-port MN25208A SmartCal™ automatic calibration kit with connector options MN25208A-001, -002, -003

| Frequency Range | Directivity (dB) | Source Match (dB) | Load Match ^a (dB) | Reflection Tracking ^a (dB) | Transmission Tracking ^a (dB) |
|------------------|------------------|-------------------|------------------------------|---------------------------------------|---|
| 1 MHz to 1 GHz | ≥ 42 | ≥ 35 | ≥ 41 | ± 0.15 | ±0.06 |
| > 1 GHz to 5 GHz | ≥ 42 | ≥ 35 | ≥ 41 | ± 0.08 | ±0.08 |
| > 5GHz to 8 GHz | ≥ 36 | ≥ 35 | ≥ 36 | ± 0.1 | ±0.08 |

a. Characteristic performance.

Measurement Uncertainties

The graphs give measurement uncertainties after the above error-corrected calibration. The errors are a worst-case contribution of residual directivity, load and source match, frequency response and isolation, network analyzer dynamic accuracy, and connector repeatability. 10 Hz IF Bandwidth is used. For transmission uncertainties, it is assumed that $S_{11} = S_{22} = 0$. A nominal amount of time drift is included in the computation as is consistent with the use of phase compensation mode. Without phase compensation, uncertainties hold, but for a shorter amount of time/temperature change after calibration. For reflection uncertainties, it is assumed that $S_{21} = S_{12} = 0$. All calibrations and measurements were performed at default port power. For other conditions, please use our free Exact Uncertainty Calculator software, available for download from the Anritsu web site at www.anritsu.com.

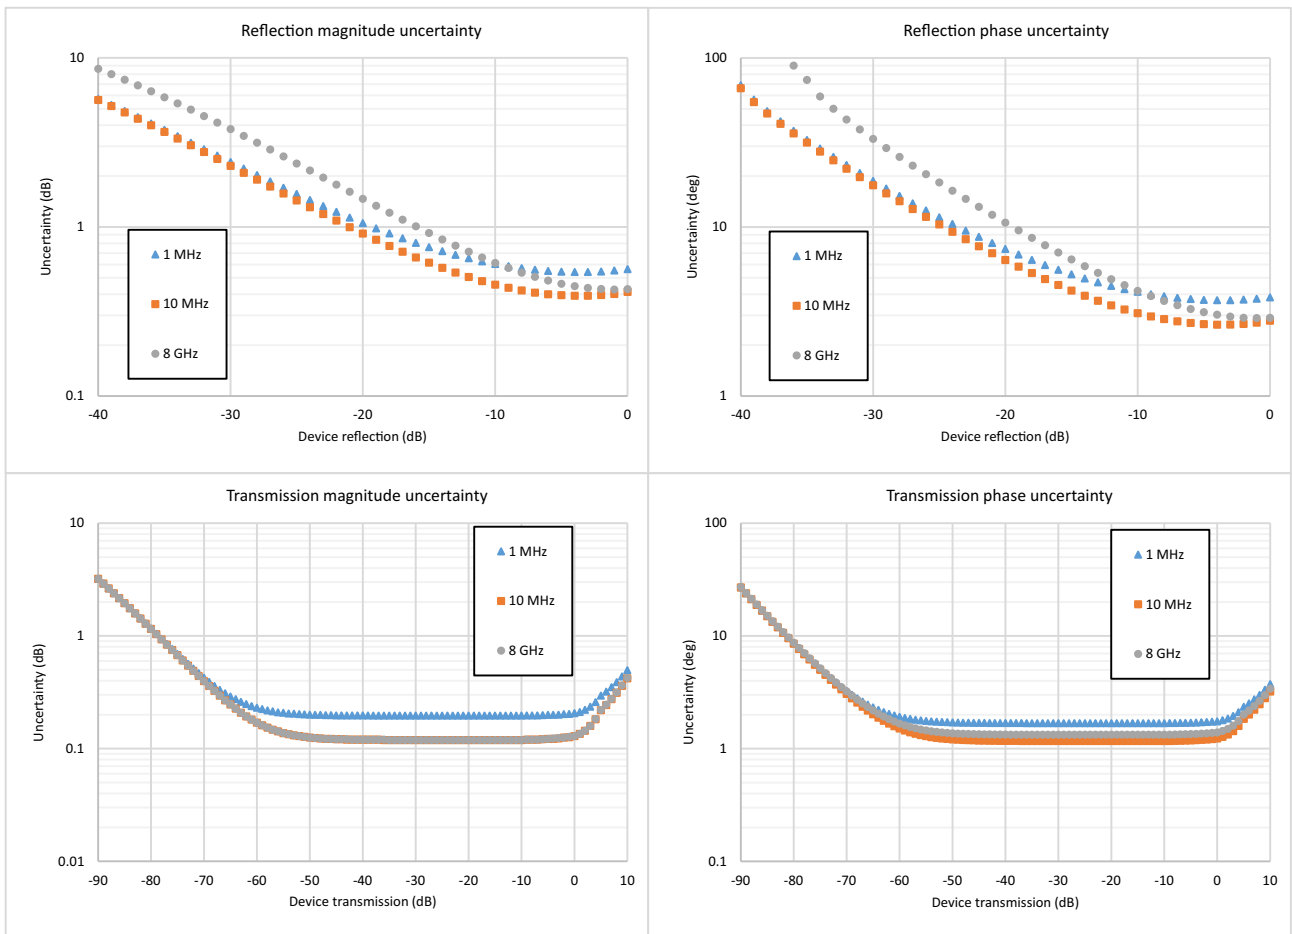

MS46131A-010 VNA System Performance with SmartCal™

Error-Corrected Specifications


With calibration using the 4-port MN25408A SmartCal™ automatic calibration kit with connector options MN25408A-001, -002, -003

| Frequency Range | Directivity (dB) | Source Match (dB) | Load Match ^a (dB) | Reflection Tracking ^a (dB) | Transmission Tracking ^a (dB) |
|------------------|------------------|-------------------|------------------------------|---------------------------------------|---|
| 1 MHz to 1 GHz | ≥ 42 | ≥ 35 | ≥ 41 | ± 0.15 | ±0.2 |
| > 1 GHz to 5 GHz | ≥ 37 | ≥ 35 | ≥ 36 | ± 0.08 | ±0.2 |
| > 5 GHz to 8 GHz | ≥ 37 | ≥ 32 | ≥ 36 | ± 0.2 | ±0.2 |

a. Characteristic performance.

Measurement Uncertainties

The graphs give measurement uncertainties after the above error-corrected calibration. The errors are a worst-case contribution of residual directivity, load and source match, frequency response and isolation, network analyzer dynamic accuracy, and connector repeatability. 10 Hz IF Bandwidth is used. For transmission uncertainties, it is assumed that $S_{11} = S_{22} = 0$. A nominal amount of time drift is included in the computation as is consistent with the use of phase compensation mode. Without phase compensation, uncertainties hold, but for a shorter amount of time/temperature change after calibration. For reflection uncertainties, it is assumed that $S_{21} = S_{12} = 0$. All calibrations and measurements were performed at default port power. For other conditions, please use our free Exact Uncertainty Calculator software, available for download from the Anritsu web site at www.anritsu.com.

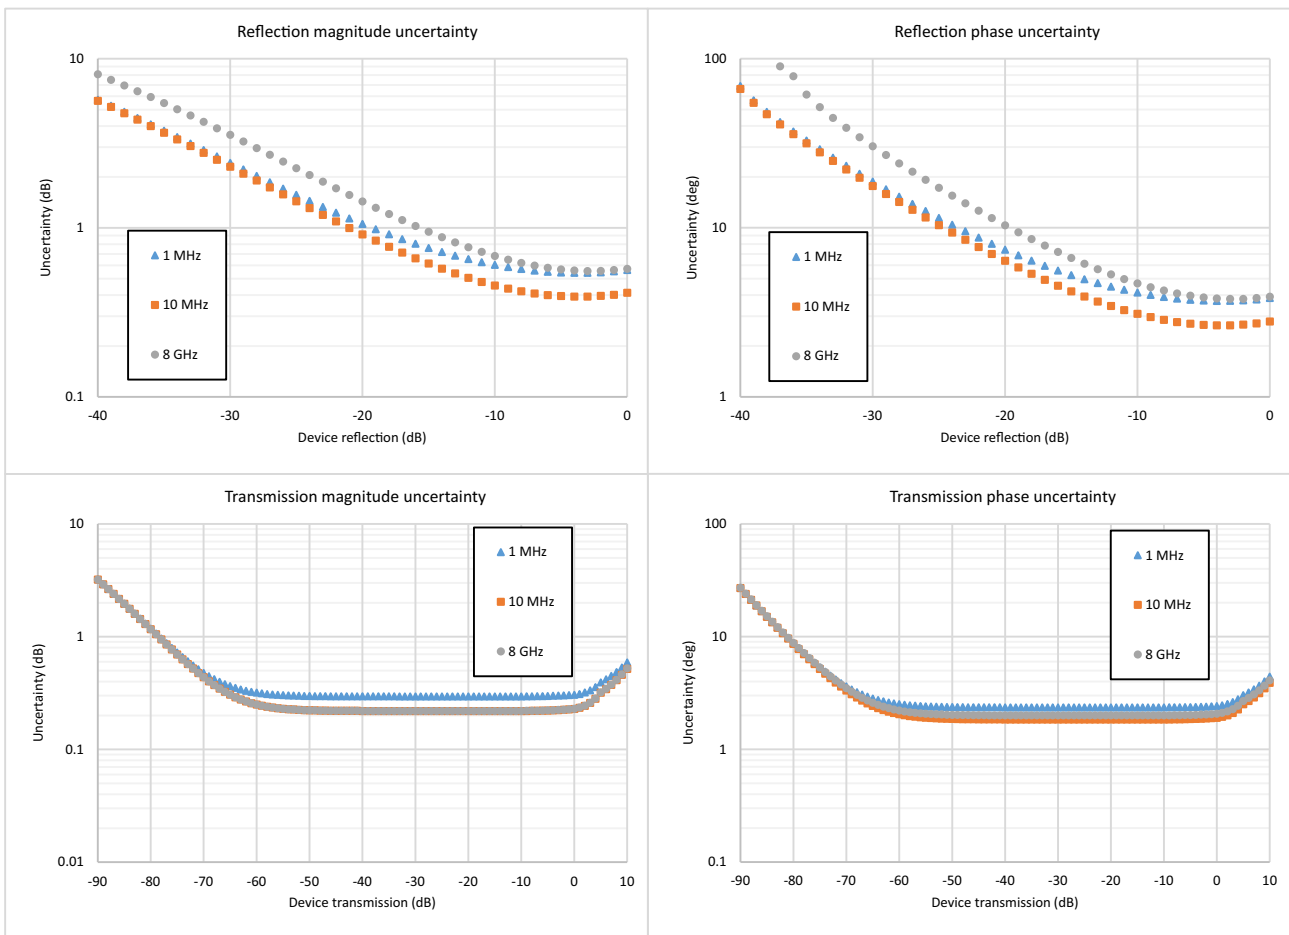

MS46131A-010, MS46131A-020 VNA System Performance with SmartCal™

Error-Corrected Specifications


With calibration using the 2-port MN25218A SmartCal™ automatic calibration kit.

| Frequency Range | Directivity (dB) | Source Match (dB) | Load Match ^a (dB) | Reflection Tracking ^a (dB) | Transmission Tracking ^a (dB) |
|--------------------|------------------|-------------------|------------------------------|---------------------------------------|---|
| 1 MHz to 1 GHz | ≥ 42 | ≥ 33 | ≥ 41 | ± 0.15 | ±0.1 |
| > 1 GHz to 10 GHz | ≥ 37 | ≥ 33 | ≥ 41 | ± 0.15 | ±0.1 |
| > 10 GHz to 18 GHz | ≥ 37 | ≥ 33 | ≥ 35 | ± 0.15 | ±0.1 |
| > 18 GHz to 20 GHz | ≥ 37 | ≥ 33 | ≥ 35 | ± 0.20 | ±0.15 |

a. Characteristic performance.

Measurement Uncertainties

The graphs give measurement uncertainties after the above error-corrected calibration. The errors are a worst-case contribution of residual directivity, load and source match, frequency response and isolation, network analyzer dynamic accuracy, and connector repeatability. 10 Hz IF Bandwidth is used. For transmission uncertainties, it is assumed that $S_{11} = S_{22} = 0$. A nominal amount of time drift is included in the computation as is consistent with the use of phase compensation mode. Without phase compensation, uncertainties hold, but for a shorter amount of time/temperature change after calibration. For reflection uncertainties, it is assumed that $S_{21} = S_{12} = 0$. All calibrations and measurements were performed at default port power. For other conditions, please use our free Exact Uncertainty Calculator software, available for download from the Anritsu web site at www.anritsu.com.

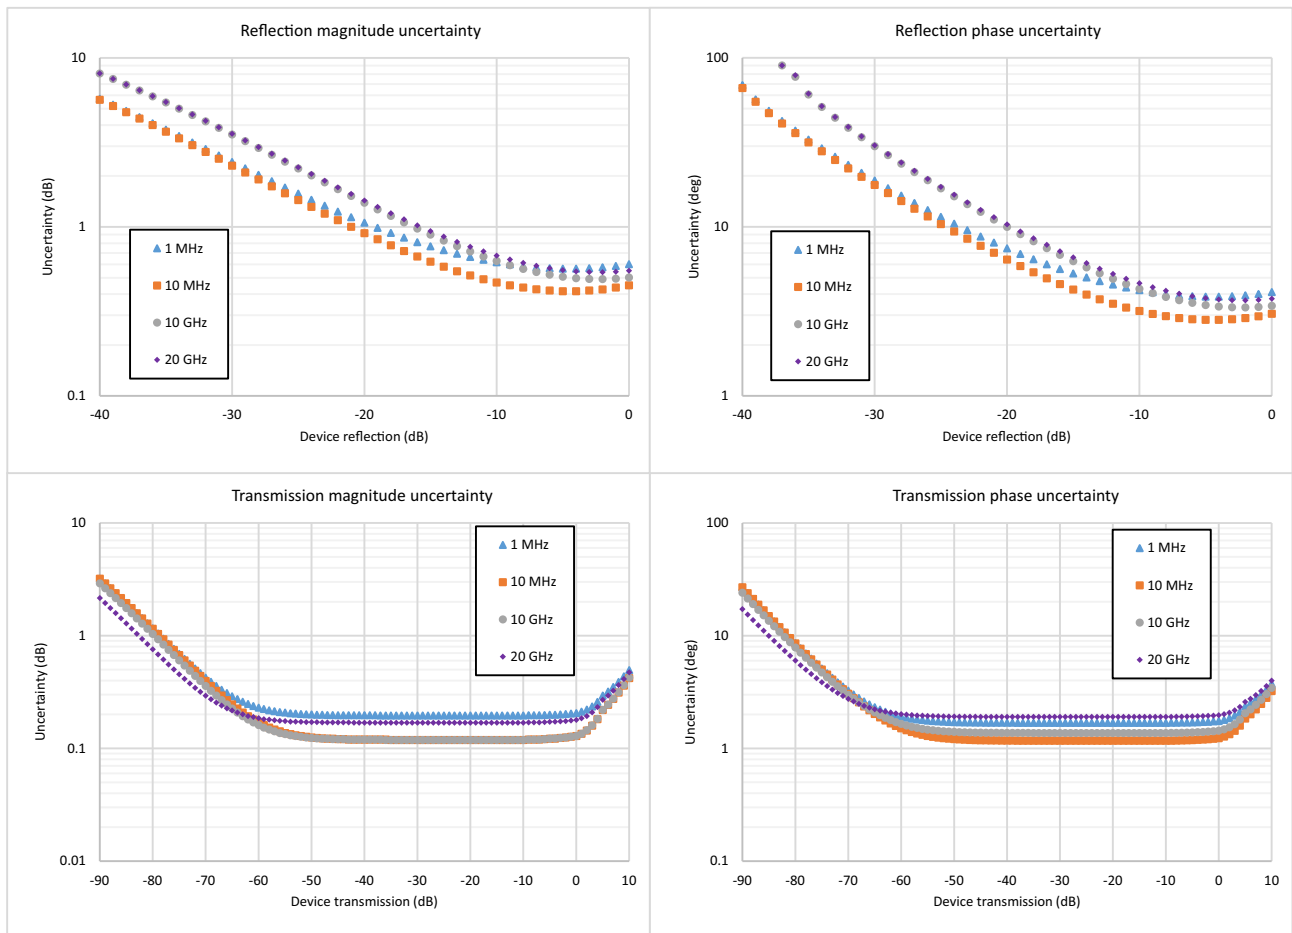

MS46131A-010, MS46131A-020 VNA System Performance with SmartCal™

Error-Corrected Specifications


With calibration using the 4-port MN25418A SmartCal™ automatic calibration kit.

| Frequency Range | Directivity (dB) | Source Match (dB) | Load Match ^a (dB) | Reflection Tracking ^a (dB) | Transmission Tracking ^a (dB) |
|--------------------|------------------|-------------------|------------------------------|---------------------------------------|---|
| 1 MHz to 10 MHz | ≥ 40 | ≥ 31 | ≥ 41 | ± 0.15 | ±0.20 |
| > 10 MHz to 6 GHz | ≥ 40 | ≥ 31 | ≥ 41 | ± 0.15 | ±0.15 |
| > 6 GHz to 18 GHz | ≥ 35 | ≥ 31 | ≥ 36 | ± 0.20 | ±0.20 |
| > 18 GHz to 20 GHz | ≥ 35 | ≥ 31 | ≥ 33 | ± 0.20 | ±0.25 |

a. Characteristic performance.

Measurement Uncertainties

The graphs give measurement uncertainties after the above error-corrected calibration. The errors are a worst-case contribution of residual directivity, load and source match, frequency response and isolation, network analyzer dynamic accuracy, and connector repeatability. 10 Hz IF Bandwidth is used. For transmission uncertainties, it is assumed that $S_{11} = S_{22} = 0$. A nominal amount of time drift is included in the computation as is consistent with the use of phase compensation mode. Without phase compensation, uncertainties hold, but for a shorter amount of time/temperature change after calibration. For reflection uncertainties, it is assumed that $S_{21} = S_{12} = 0$. All calibrations and measurements were performed at default port power. For other conditions, please use our free Exact Uncertainty Calculator software, available for download from the Anritsu web site at www.anritsu.com.

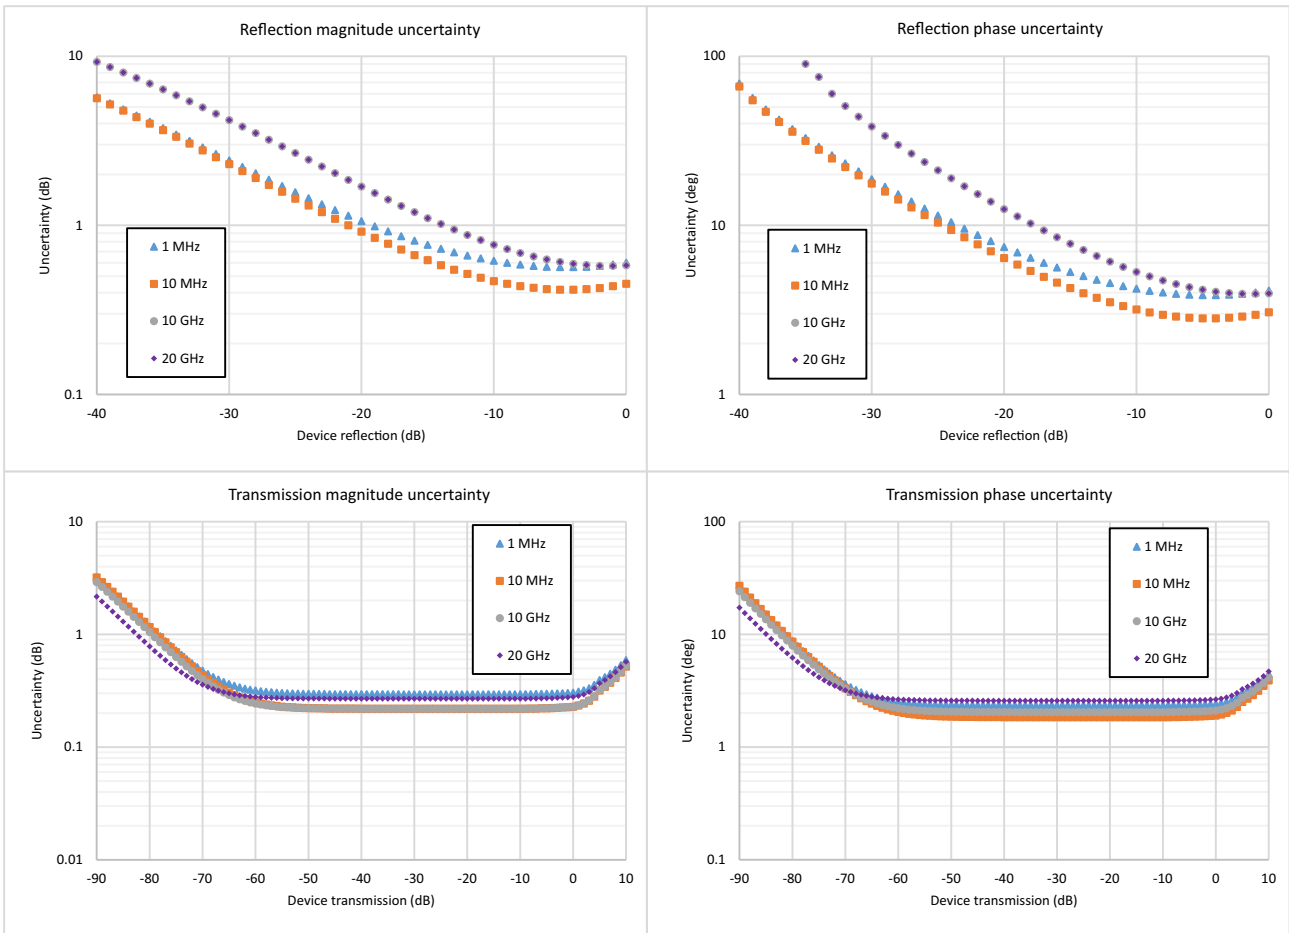

MS46131A-043 VNA System Performance with Precision AutoCal™

Error-Corrected Specifications


With calibration using the 36585K automatic calibration kit with type K connectors.

| Frequency Range | Directivity (dB) | Source Match (dB) | Load Match ^a (dB) | Reflection Tracking ^a (dB) | Transmission Tracking ^a (dB) |
|--------------------|------------------|-------------------|------------------------------|---------------------------------------|---|
| 1 MHz to < 10 GHz | ≥ 50 | ≥ 49 | ≥ 42 | ± 0.15 | ±0.06 |
| 10 GHz to < 20 GHz | ≥ 45 | ≥ 49 | ≥ 36 | ± 0.15 | ±0.06 |
| 20 GHz to < 30 GHz | ≥ 45 | ≥ 45 | ≥ 36 | ± 0.10 | ±0.06 |
| 30 GHz to 40 GHz | ≥ 45 | ≥ 45 | ≥ 30 | ± 0.10 | ±0.06 |

a. Characteristic performance.

Measurement Uncertainties

The graphs give measurement uncertainties after the above error-corrected calibration. The errors are a worst-case contribution of residual directivity, load and source match, frequency response and isolation, network analyzer dynamic accuracy, and connector repeatability. 10 Hz IF Bandwidth is used. For transmission uncertainties, it is assumed that $S_{11} = S_{22} = 0$. A nominal amount of time drift is included in the computation as is consistent with the use of phase compensation mode. Without phase compensation, uncertainties hold, but for a shorter amount of time/temperature change after calibration. For reflection uncertainties, it is assumed that $S_{21} = S_{12} = 0$. All calibrations and measurements were performed at default port power. For other conditions, please use our free Exact Uncertainty Calculator software, available for download from the Anritsu web site at www.anritsu.com.

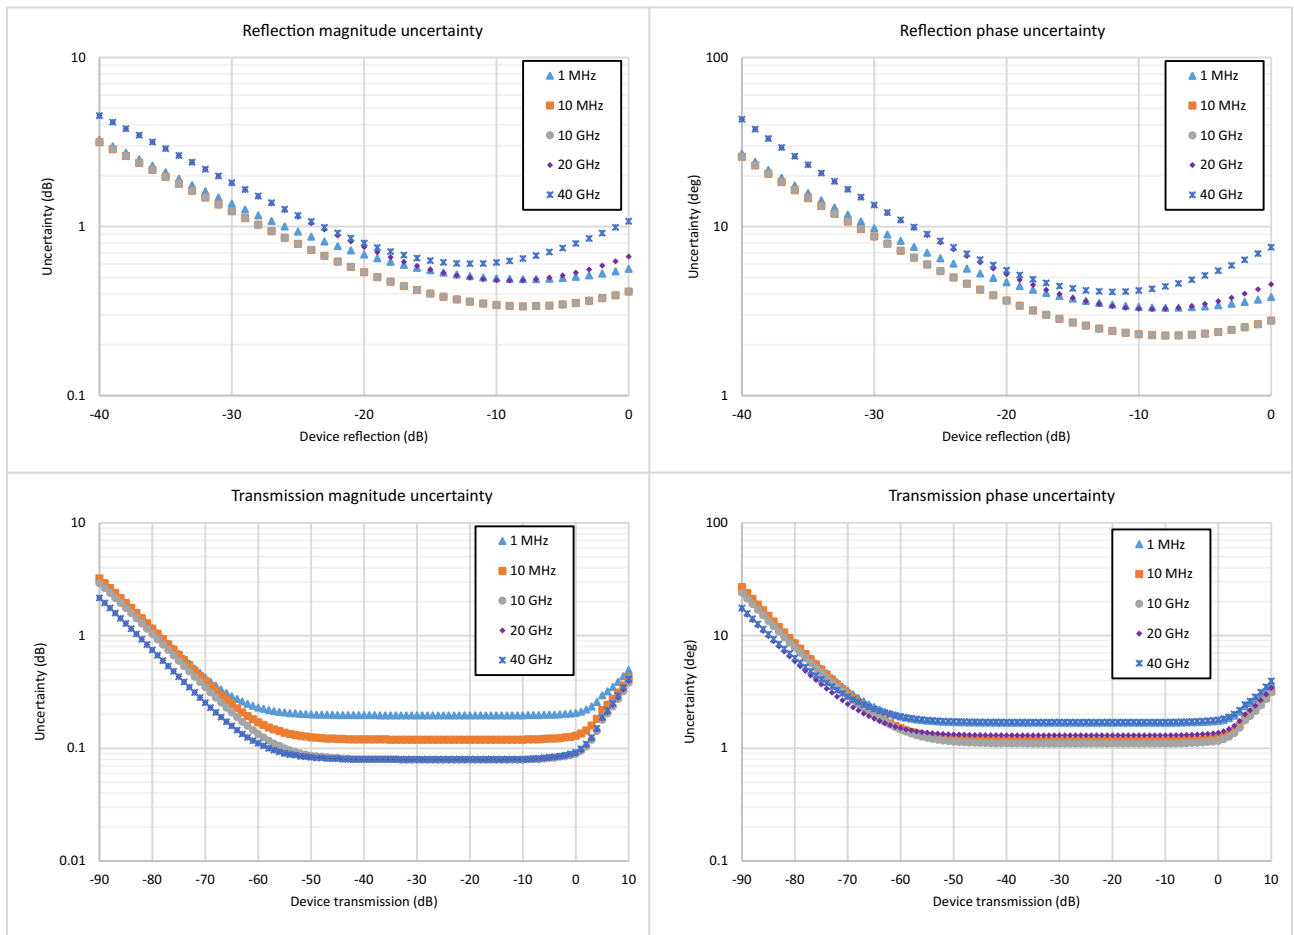

Measurement Throughput

Measurement Speed

170 μs/point (1-port calibrated data, typical)

230 μs/point (2-port calibrated data, typical)

Per point single sweep time, including placing measurement data into memory. Average of narrow, mid, and wide frequency span sweeps. Measured with 300 kHz IFBW, 1601 points. Timing dependent on external computer configuration. Measurements taken with an Intel® Core™ i5-6300U processor running Windows 10 with 4 GB of RAM and 60 GB of free hard disk space.

Standard Capabilities

| | | |
|------------------------------------|--------------------------------|---|
| Operating Frequencies | | Applies to all PhaseLync cable lengths. |
| | ME7868A-010 | 1 MHz to 8 GHz |
| | ME7868A-020 | 1 MHz to 20 GHz |
| | ME7868A-043 | 1 MHz to 43.5 GHz |
| Measurement Parameters | | |
| | 2-Port Measurements | S11, S21, S22, S12, and any user-defined combination of a1, a2, b1, b2, 1 Maximum Efficiency Analysis, Mixed-mode SDD, SDC, SCD, SCC |
| | Domains | Frequency Domain, Time (Distance) Domain (Option 002) |
| Sweeps | | |
| | Frequency Sweep Types | Linear, Log, CW, or Segmented |
| Display Graphs | | |
| | Single Rectilinear Graph Types | Log Magnitude, Phase, Group Delay, Linear Magnitude, Real, Imaginary, SWR, Impedance |
| | Dual Rectilinear Graph Types | Log Mag and Phase, Linear Mag and Phase, Real and Imaginary |
| | Circular Graph Types | Smith Chart (Impedance), Polar |
| Measurements Data Points | | |
| | Maximum Data Points | 2 to 16,001 points |
| Limit Lines | | |
| | Limit Lines | Single or segmented. 2 limit lines per trace. 50 segments per trace. |
| | Single Limit Readouts | Uses interpolation to determine the intersection frequency. |
| | Test Limits | Both single and segmented limits can be used for PASS/FAIL testing. |
| Ripple Limit Lines | | |
| | Limit Lines | Single or segmented. 2 limit lines per trace. 50 segments per trace. |
| | Ripple Value | Absolute Value or Margin |
| | Test Limits | Both single and segmented limits can be used for PASS/FAIL testing. |
| Averaging | | |
| | Point-by-Point | Point-by-point (default), maximum number of averages = 200 |
| | Sweep-by-Sweep | Sweep-by-sweep, maximum number of averages = 4096 |
| IF Bandwidth | | |
| | | 10, 20, 50, 70, 100, 200, 300, 500, 700 Hz 1, 2, 3, 5, 7, 10, 20, 30, 50, 70, 100, 200, 300 kHz |
| Reference Plane | | |
| | Line Length or Time Delay | The reference planes of a calibration or other normalization can be changed by entering a line length or time delay. |
| | Dielectric Constants | Dielectric constants may be entered for different media so the length entry can be physically meaningful. |
| | Dispersion Modeling | Dispersion modeling is used in the cases of microstrip and waveguide to take into account frequency dependent phase velocities. |
| | Attenuation | Attenuation (with frequency slope) and constant phase offsets can be entered to better describe any reference plane distortions. The frequency dependence exponent is changeable. |
| | Auto Modes | Automatic reference plane finding tools are available for phase alone or phase + magnitude. These routines do a fitting process on phase or phase and magnitude to estimate the reference plane location and enter correcting values. |
| | De-embedding | For more complete reference plane manipulation, the full de-embedding system can also be used. |
| Measurement Frequency Range | | |
| | Frequency Range Change | Frequency range of the measurement can be narrowed within the calibration range without recalibration. |
| | CW Mode | CW mode permits single frequency measurements also without recalibration. |
| | Interpolation Not Activated | If interpolation is not activated, the subset frequency range is forced to use calibration frequency points. |
| | Interpolation Activated | If interpolation is activated, any frequency range that is a subset of the calibration frequency range can be used, but there may be some added interpolation error. |
| Group Delay | | |
| | Group Delay Aperture | Defined as the frequency span over which the phase change is computed at a given frequency point. |
| | Aperture | The aperture can be changed without recalibration. |
| | Minimum Aperture | The minimum aperture is the frequency range divided by the number of points in calibration and can be increased to 20 % of the frequency range. |
| | Group Delay Range | < 180° of phase change within the aperture |

Channels, Display, and Traces

| | |
|-----------------------|---|
| Channels and Traces | 16 channels, each with up to 16 traces |
| Display Colors | Unlimited colors for data traces, memory, text, markers, graticules, and limit lines |
| Trace Memory and Math | Up to 20 trace memories per channel can be used to store trace measurement data for later display or subtraction, addition, multiplication or division with current measurement data. The trace data can be saved and recalled. |
| Inter-trace Math | Any two traces within a channel can be combined (via addition, subtraction, multiplication, or division) and displayed on another trace. An equation editor mode is also available that allows the combination of trace data, trace memory and S-parameter data in more complex equations. Over 30 built-in functions are available. Simple editing tools and the ability to save/recall equations are also provided. |

Scale Resolution

| | |
|------------------|---|
| | Minimum per division, varies with graph type. |
| Log Magnitude | 0.001 dB |
| Linear Magnitude | 10 μ U |
| Phase | 0.01° |
| Group Delay | 0.1 ps |
| Time | 0.0001 ps |
| Distance | 0.1 μ m |
| SWR | 10 μ U |
| Power | 0.01 dB |

Markers

| | |
|----------------------------|--|
| Markers | 12 markers + 1 reference marker |
| Marker Coupling | Coupled or decoupled |
| Marker Overlay | Display markers on active trace only or on all traces when multiple trace responses are present on the same trace |
| Marker Data | Data displayed in graph area or in table form |
| Reference Marker | Additional marker per trace for reference |
| Marker Statistics | Mean, maximum, minimum, standard deviation |
| Marker Search and Tracking | Per trace or over a marker region Search and/or track for minimum, maximum, peak, or target value. Multiple marker search ranges per trace are available. |

Other

| | |
|------------------------|---|
| Filter Parameters | Display bandwidth (user-selectable loss value), corner and center frequencies, loss, Q, and shape factors. |
| S-Parameter Conversion | Z Reflection Impedance Z Transmission Impedance Y Reflection Admittance Y Transmission Admittance 1/S |

Calibration and Correction Capabilities

Calibration Methods

Short-Open-Load-Through (SOLT)
 Offset-Short-Offset-Short-Load-Through (SSLT)
 Triple-Offset-Short-Through (SSST)
 Short-Open-Load-Reciprocal (SOLR)
 Line-Reflect-Line (LRL) / Line-Reflect-Match (LRM)
 Thru-Reflect-Line (TRL) / Thru-Reflect-Match (TRM)
 SmartCal™
 AutoCal™
 Thru Update available
 Secondary match correction available for improved low insertion loss measurements

Correction Models

1-Port (S11, S22, or both)
 2-Port (Forward, Reverse, or both directions)
 Transmission Frequency Response (Forward, Reverse, or both directions)
 Reflection Frequency Response (S11, S22, or both)

Coefficients for Calibration Standards

Use the Anritsu calibration kit USB memory device to load kit coefficients and characterization files.
 Enter coefficients into user-defined locations.
 Use complex load models.

Interpolation

Allows interpolation between calibration frequency points.

Adapter Removal Calibration

Characterizes and “removes” an adapter that is used during calibration that will not be used for subsequent device measurements; for accurate measurement of non-insertable devices.

Dispersion Compensation

Selectable as Coaxial, other non-dispersive (e.g., for coplanar waveguide), Waveguide, or Microstrip

Embedding/De-embedding

The ME7868A is equipped with an Embedding/De-embedding system.

De-embedding is generally used for removal of test fixture contributions, modeled networks, and other networks described by S-parameters (s2p files) from measurements.

Embedding Similarly, the Embedding function can be used to simulate matching circuits for optimizing amplifier designs or simply adding effects of a known structure to a measurement.

Multiple Networks Multiple networks can be embedded/de-embedded and changing the port and network orientations is handled easily.

Extraction Utility An extraction utility is part of this package that allows easier computation of de-embedding files based on additional calibration steps and measurements.

Impedance Conversion

Allows entry of different reference impedances (complex values) for different ports

Optional Capabilities

Time Domain Measurements, MS46131A-002 Displays all S-parameters and overlays with Frequency Domain, Low-pass Mode with added harmonics frequency list flexibility, Band-pass Mode, Phasor Impulse Mode, Windowing, Gating (pass-band or reject-band), and Frequency with Time Gate. Option must be enabled on both MS46131As in the ME7868A configuration for time domain to be enabled for the 2-port VNA.

Remote Operability

ShockLine supports several remote operability options.

| Communication Type | Data Format | Performance | Description |
|--------------------|---|------------------------------------|-------------|
| Drivers | IVI-C drivers are available for download from the Anritsu website. The IVI-C package supports National Instruments LabVIEW and LabWindows, C#, .NET, MATLAB, and Python programming environments. | | |
| Triggering | Start Trigger | Software and Digital Edge | |
| | Input Range | +3.3 V logic level (+5 V tolerant) | |
| | Minimum Trigger Width | 50 ns | |
| | Trigger Delay | 6 μs, typical | |

Standard Device Connections



2 Meter

ME7868A-010-2: 1 MHz to 8 GHz

ME7868A-020-2: 1 MHz to 20 GHz

ME7868A-043-2: 1 MHz to 43.5 GHz

Solution includes:

- Two MS46131A Modular 1-Port VNAs:
 - Each VNA must have one frequency option 010 / 020 / 043
 - Each VNA must have Option 012 PhaseLync
- One 2000-2011-R (2 meter) PhaseLync Optical Cable (PLO)
- One 2000-2013-R (2 meter) PhaseLync Electrical Cable (PLE)
- Windows PC is user supplied



5 Meter


ME7868A-010-5: 1 MHz to 8 GHz

ME7868A-020-5: 1 MHz to 20 GHz

ME7868A-043-5: 1 MHz to 43.5 GHz

Solution includes:

- Two MS46131A Modular 1-Port VNAs:
 - Each VNA must have one frequency option 010 / 020 / 043
 - Each VNA must have Option 012 PhaseLync
- One 2000-2012-R (5 meter) PhaseLync Optical Cable (PLO)
- One 2000-2014-R (5 meter) PhaseLync Electrical Cable (PLE)
- Two 3 meter USB extension cables
- Windows PC is user supplied

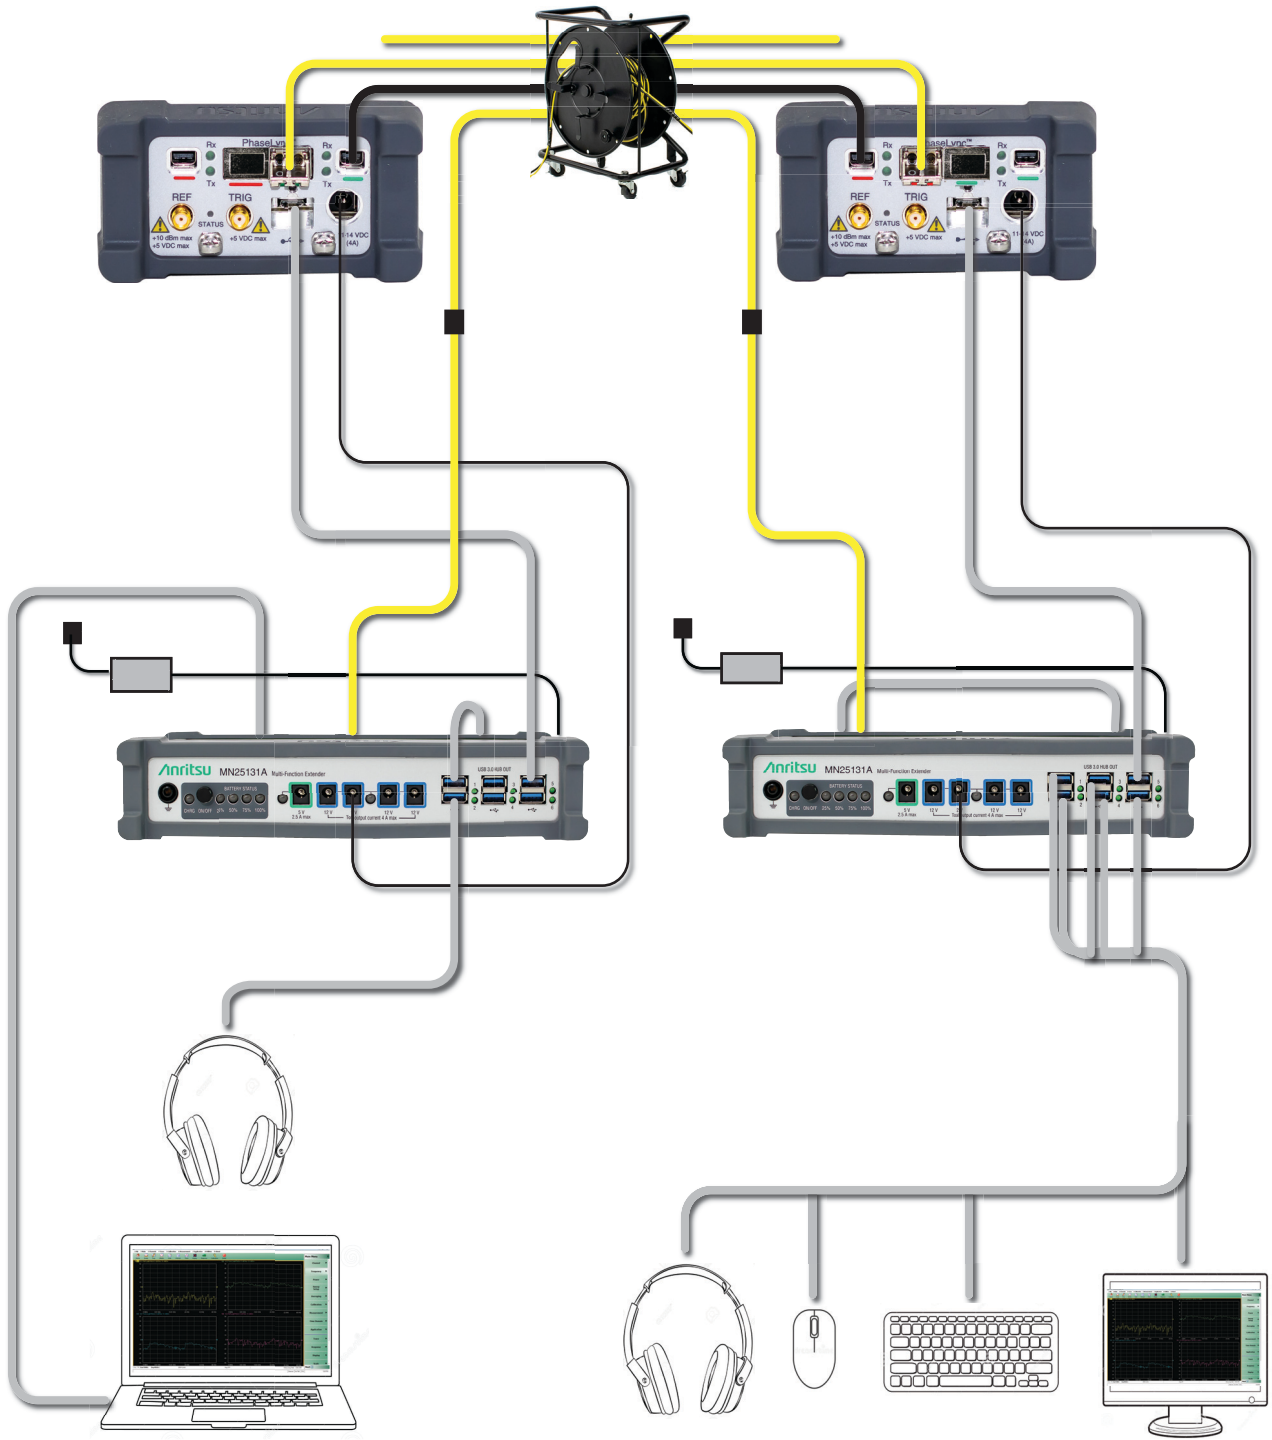

| | |
|-----------------|--|
| 25 Meter | <p>Solution includes:</p> <ul style="list-style-type: none">• Two MS46131A Modular 1-Port VNAs:<ul style="list-style-type: none">- Each VNA must have one frequency option 010 / 020 / 043- Each VNA must have Option 012 PhaseLync• One 2000-2025-R (25 meter) PhaseLync Cable Assembly• One 2000-2007-R PhaseLync Accessory Kit:<ul style="list-style-type: none">- Two MN25131A Multifunction Extenders- USB Monitor- USB Keyboard/Mouse- Two USB Headsets- Extender Connection Cables• Windows PC is user supplied |
|-----------------|--|

For distances > 25 meters, please contact the factory.

| | | |
|--------------------------------------|--|---|
| Test Port | ME7868A-010 ME7868A-020 ME7868A-043 Damage Input Levels | N(f) Ruggedized K(m) Ruggedized Extended-K™(m) +23 dBm maximum, ±50 VDC maximum |
| 10 MHz In | Connector Type Signal | Signal presence is auto-sensing (better than 10 ppm frequency accuracy is recommended). SMA(f) +0 dBm, typical; 50 Ω, nominal |
| External Trigger Input/Output | Connector Type | External trigger input should be applied to the master MS46131A in the ME7868A. External trigger output may be accessed on the slave MS46131A. SMA(f) |
| | Voltage Input Impedance Pulse Width Trigger Delay | 0 to 3.3 V input (5 V tolerant) High impedance (> 100 kΩ) 50 ns minimum input pulse width 6 μs typical |
| | Voltage Output Drive Current Pulse Width | 0 to 3.3 V (HCMOS logic) 12 mA maximum 1 μs, typical |

Recommended External PC Configuration

| | |
|---------|---|
| CPU | Intel® Core™ i5-6300U Processor |
| RAM | 4 GB |
| Disk | 120 GB |
| DirectX | Version 9 with Windows Display Driver Model (WDDM) installed ShockLine software is compatible with Windows® 7, 8, 8.1, or 10; 32 or 64 bit operating systems |
| USB | One USB 2.0 (or higher) type A port per MS46131A used To increase the number of USB ports available, an externally powered USB hub may also be used. |

Regulatory Compliance

| | |
|---------------------------|--|
| European Union | EMC 2014/30/EU, EN 61326:2013, CISPR 11/EN 55011, IEC/EN 61000-4-2/3/4/5/6/8/11 Low Voltage Directive 2014/35/EU Safety EN 61010-1:2010 RoHS Directive 2011/65/EU applies to instruments with CE marking placed on the market after July 22, 2017 |
| Australia and New Zealand | RCM AS/NZS 4417:2012 |
| South Korea | KCC-REM-A21-0004 |

Environmental

| | |
|-----------------------------|--|
| MIL-PRF-28800F Class 2 | |
| Operating Temperature Range | -10 °C to 55 °C |
| Storage Temperature Range | -51 °C to 71 °C |
| Maximum Relative Humidity | 95 % RH at 30 °C, non-condensing |
| Altitude | 4600 meters, operating and non-operating |

Warranty

| | |
|-------------------------------|---|
| MS46131A and Built-In Options | 3 years from the date of shipment (standard warranty) |
| MN25131A | Typically 1 year from the date of shipment |
| PhaseLync cables | Typically 1 year from the date of shipment |
| Calibration Kits | Typically 1 year from the date of shipment |
| Test Port Cables | Typically 1 year from the date of shipment |
| Warranty Options | Additional warranty available |

Ordering Information

| | | |
|---------------------------|-----------------------|--|
| ME7868A 2-Port VNA | 2 meter | ME7868A-010-2: 2-port Modular ME7868A Vector Network Analyzer, 1 MHz to 8 GHz ME7868A-020-2: 2-port Modular ME7868A Vector Network Analyzer, 1 MHz to 20 GHz ME7868A-043-2: 2-port Modular ME7868A Vector Network Analyzer, 1 MHz to 43.5 GHz |
| | 5 meter | ME7868A-010-5: 2-port Modular ME7868A Vector Network Analyzer, 1 MHz to 8 GHz ME7868A-020-5: 2-port Modular ME7868A Vector Network Analyzer, 1 MHz to 20 GHz ME7868A-043-5: 2-port Modular ME7868A Vector Network Analyzer, 1 MHz to 43.5 GHz |
| | 25 meter ¹ | ME7868A-010-25: 2-port Modular ME7868A Vector Network Analyzer, 1 MHz to 8 GHz ME7868A-020-25: 2-port Modular ME7868A Vector Network Analyzer, 1 MHz to 20 GHz ME7868A-043-25: 2-port Modular ME7868A Vector Network Analyzer, 1 MHz to 43.5 GHz |

VNA Options

| | |
|---------------------|---|
| Main Options | MS46131A-002, Time Domain with Time Gating |
| Calibration Options | VNA performance is determined by the verified performance of the two MS46131As in the configuration. Calibration options offered for the MS46131A only. MS46131A-098, Standard Calibration, ISO 17025 compliant, without data MS46131A-099, Premium Calibration, ISO 17025 compliant, with data |

Precision Automatic Calibrator Modules

| | |
|-----------------------|--|
| MN25208A | 2-port USB SmartCal Module, 300 kHz to 8.5 GHz (available with connector Options -001 N(f), -002 K(f), -003 3.5 mm(f)) |
| MN25408A | 4-port USB SmartCal Module, 300 kHz to 8.5 GHz (available with connector Options -001 N(f), -002 K(f), -003 3.5 mm(f)) |
| MN25218A ² | 2-port USB SmartCal Module, 300 kHz to 20 GHz (available with connector Option -002 K(f)) |
| MN25418A | 4-port USB SmartCal Module, 300 kHz to 20 GHz (available with connector Option -002 K(f)) |
| 36585K-2M | K Connector Precision AutoCal Module, 70 kHz to 40 GHz, K(m) to K(m) |
| 36585K-2F | K Connector Precision AutoCal Module, 70 kHz to 40 GHz, K(f) to K(f) |
| 36585K-2MF | K Connector Precision AutoCal Module, 70 kHz to 40 GHz, K(m) to K(f) |
| 2000-1809-R | Serial to USB Adapter (required for use with 36585 AutoCal module if control PC does not have a serial port) |

Mechanical Calibration Kits

| | |
|----------------|---|
| 3650A | SMA/3.5 mm Calibration Kit, Without Sliding Loads, DC to 26.5 GHz, 50 Ω |
| 3650A-1 | SMA/3.5 mm Calibration Kit, With Sliding Loads, DC to 26.5 GHz, 50 Ω |
| 3652A | K Connector Calibration Kit, Without Sliding Loads, DC to 40 GHz, 50 Ω |
| 3652A-1 | K Connector Calibration Kit, With Sliding Loads, DC to 40 GHz, 50 Ω |
| 3653A | N Connector Calibration Kit, Without Sliding Loads, DC to 18 GHz, 50 Ω |
| OSLN50A-8 | Precision N Male Open/Short/Load Mechanical Calibration Tee, DC to 8 GHz, 50 Ω |
| OSLNF50A-8 | Precision N Female Open/Short/Load Mechanical Calibration Tee, DC to 8 GHz, 50 Ω |
| TOSLN50A-8 | Precision N Male Through/Open/Short/Load Mechanical Calibration Tee, DC to 8 GHz, 50 Ω |
| TOSLNF50A-8 | Precision N Female Through/Open/Short/Load Mechanical Calibration Tee, DC to 8 GHz, 50 Ω |
| OSLN50A-18 | Precision N Male Open/Short/Load Mechanical Calibration Tee, DC to 18 GHz, 50 Ω |
| OSLNF50A-18 | Precision N Female Open/Short/Load Mechanical Calibration Tee, DC to 18 GHz, 50 Ω |
| TOSLN50A-18 | Precision N Male Through/Open/Short/Load Mechanical Calibration Tee, DC to 18 GHz, 50 Ω |
| TOSLNF50A-18 | Precision N Female Through/Open/Short/Load Mechanical Calibration Tee, DC to 18 GHz, 50 Ω |
| TOSLK50A-20 | Precision K Male Through/Open/Short/Load Mechanical Calibration Tee, DC to 20 GHz, 50 Ω |
| TOSLKF50A-20 | Precision K Female Through/Open/Short/Load Mechanical Calibration Tee, DC to 20 GHz, 50 Ω |
| TOSLK50A-40 | Precision K Male Through/Open/Short/Load Mechanical Calibration Tee, DC to 40 GHz, 50 Ω |
| TOSLKF50A-40 | Precision K Female Through/Open/Short/Load Mechanical Calibration Tee, DC to 40 GHz, 50 Ω |
| TOSLK50A-43.5 | Precision K Male Through/Open/Short/Load Mechanical Calibration Tee, DC to 43.5 GHz, 50 Ω Includes .s1p files for data-based calibration support |
| TOSLKF50A-43.5 | Precision K Female Through/Open/Short/Load Mechanical Calibration Tee, DC to 43.5 GHz, 50 Ω Includes .s1p files for data-based calibration support |

1. All 25 meter configurations come with additional components to enable long distance usage. These items include two MN25131A multi-function extenders, USB monitor, keyboard, mouse, headset, and additional cabling to allow for communication and control from either side of the 25 meter setup.
2. Applies to Rev 2 SmartCal Modules. MN25218A with serial numbers < 1817999 operate from 1 MHz to 20 GHz.

Adapters

| | |
|-----------|---|
| 1091-26-R | Adapter, SMA(m) to N(m), DC to 18 GHz, 50 Ω |
| 1091-27-R | Adapter, SMA(f) to N(m), DC to 18 GHz, 50 Ω |
| 1091-80-R | Adapter, SMA(m) to N(f), DC to 18 GHz, 50 Ω |
| 1091-81-R | Adapter, SMA(f) to N(f), DC to 18 GHz, 50 Ω |
| 71693-R | Ruggedized adapter, K(f) to N(f), DC to 18 GHz, 50 Ω |
| 33KK50C | Calibration Grade Adapter, DC to 43.5 GHz, K(m) to K(m), 50 Ω |
| 33KKF50C | Calibration Grade Adapter, DC to 43.5 GHz, K(m) to K(f), 50 Ω |
| 33KFKF50C | Calibration Grade Adapter, DC to 43.5 GHz, K(f) to K(f), 50 Ω |
| 34NK50 | Precision Adapter, N(m) to K(m), DC to 18 GHz, 50 Ω |
| 34NKF50 | Precision Adapter, N(m) to K(f), DC to 18 GHz, 50 Ω |
| 34NFK50 | Precision Adapter, N(f) to K(m), DC to 18 GHz, 50 Ω |
| 34NFKF50 | Precision Adapter, N(f) to K(f), DC to 18 GHz, 50 Ω |
| 34VFK50A | Precision Adapter, DC to 43.5 GHz, V(f) - K(m), 50 Ω |
| 34VFKF50A | Precision Adapter, DC to 43.5 GHz, V(f) - K(f), 50 Ω |
| 34VK50A | Precision Adapter, DC to 43.5 GHz, V(m) - K(m), 50 Ω |
| 34VKF50A | Precision Adapter, DC to 43.5 GHz, V(m) - K(f), 50 Ω |
| K220B | Precision Adapter, DC to 40 GHz, K(m) to K(m), 50 Ω |
| K222B | Precision Adapter, DC to 40 GHz, K(f) to K(f), 50 Ω |
| K224B | Precision Adapter, DC to 40 GHz, K(m) to K(f), 50 Ω |

Test Port Cables, Flexible, Ruggedized, Phase Stable



15 Series Cable Example

| | |
|--------------|---|
| 15NNF50-1.0B | Test Port Cable, Flexible, Phase Stable, N(f) to N(m), 1.0 m |
| 15NNF50-1.5B | Test Port Cable, Flexible, Phase Stable, N(f) to N(m), 1.5 m |
| 15NN50-1.0B | Test Port Cable, Flexible, Phase Stable, N(m) to N(m), 1.0 m |
| 15LL50-1.0A | Test Port Cable, Armored, Phase Stable, DC to 20 GHz, 3.5 mm(m) to 3.5 mm(m), 1.0 m, 50 Ω |
| 15LLF50-1.0A | Test Port Cable, Armored, Phase Stable, DC to 20 GHz, 3.5 mm(m) to 3.5 mm(f), 1.0 m, 50 Ω |
| 15KK50-1.0A | Test Port Cable, Armored, Phase Stable, DC to 20 GHz, K(m) to K(m), 1.0 m, 50 Ω |
| 15KKF50-1.0A | Test Port Cable, Armored, Phase Stable, DC to 20 GHz, K(m) to K(f), 1.0 m, 50 Ω |

Phase-Stable 18 GHz and 43.5 GHz Semi-Rigid Cables (Armored)



3670 Series Cable Example


| | |
|------------|---|
| 3670N50-1 | 0.3 m (12"), DC to 18 GHz, N(f) to N(m), 50 Ω |
| 3670NN50-1 | 0.3 m (12"), DC to 18 GHz, N(m) to N(m), 50 Ω |
| 3670N50-2 | 0.6 m (24"), DC to 18 GHz, N(f) to N(m), 50 Ω |
| 3670NN50-2 | 0.6 m (24"), DC to 18 GHz, N(m) to N(m), 50 Ω |
| 3670K50A-1 | 0.3 m (12"), DC to 43.5 GHz, K(f) to K(m), 50 Ω |
| 3670K50A-2 | 0.6 m (24"), DC to 43.5 GHz, K(f) to K(m), 50 Ω |

Phase-Stable 20 GHz and 40 GHz Test Port Cables (Flexible)



3671 Series Cable Example

| | |
|---------------|--|
| 3671KFS50-60 | 60 cm (23.6 in), DC to 20 GHz, K (f) to 3.5 mm (m), 50 Ω |
| 3671KFSF50-60 | 60 cm (23.6 in), DC to 20 GHz, K (f) to 3.5 mm (f), 50 Ω |
| 3671KFKF50-60 | 60 cm (23.6 in), DC to 40 GHz, K (f) to K (f), 50 Ω |
| 3671KFK50-100 | 100 cm (39.4 in), DC to 40 GHz, K (f) to K (m), 50 Ω |

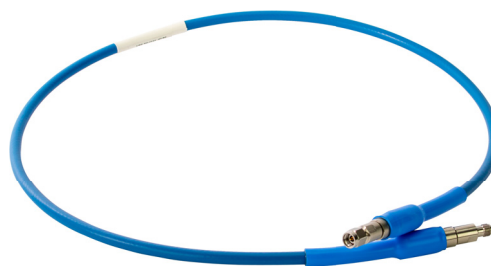

806-304-R Cable Example

| | |
|-----------|--|
| 806-304-R | 36 in (91.5 cm), DC to 40 GHz, K(m) - K(f), 50 Ω |
|-----------|--|

Tools

| | |
|------------------|---|
| 01-201 | Torque End Wrench, 5/16 in, 0.9 N·m (8 lbf·in) (for tightening male devices, for SMA, 3.5 mm, 2.4 mm, K, and V connectors) |
| 01-203 | Torque End Wrench, 13/16 in, 0.9 N·m (8 lbf·in) (for tightening ruggedized SMA, 2.4 mm, K and V test port connectors) |
| 01-204 | End Wrench, 5/16 in, Universal, Circular, Open-ended (for SMA, 3.5 mm, 2.4 mm, K, and V connectors) |
| More Information | Refer to our Precision RF & Microwave Components Catalog for descriptions of adapters and other components. |

Documentation

| | |
|--------------------|---|
| User Documentation | Soft copies of the manuals as Adobe Acrobat PDF files are available for download from the instrument model web page at www.anritsu.com . For more information and product support, please contact www.anritsu.com/contact-us . |
| 10100-00067 | ShockLine Product Information, Compliance, and Safety |
| 10410-00780 | MS46131A Series VNA Operation Manual |
| 10410-00337 | MS46121A/B, MS46122A/B, MS46131A, and MS46322A/B Series VNA User Interface Reference Manual |
| 10410-00336 | MS46122A/B, MS46131A, and MS46322A/B Series VNA Measurement Guide |
| 10410-00746 | ShockLine Programming Manual |
| 10410-00782 | ME7868A Quick Start Guide |