

# U1240 Series Handheld Digital Multimeters



# Introduction

For technicians or industrial test engineers, your ultimate goal is to keep the production line running seamlessly to prevent any unplanned shutdown. The strong and solid Keysight Technologies, Inc. U1240B and U1240C Series are just the DMMs you need to work efficiently, on the bench or in the field. Certified to IP 67 and with the durability to withstand drops up to 10 feet (3 meters) to suit harsh working environments, the U1240C can work longer for you with up to 400 hours of battery life. Better yet, you can optimize productivity with the unique remote data logging functionality via USB or *Bluetooth*<sup>®</sup>. Perform test confidently and efficiently – everything you need to get the job done.

## Key Features

- 10,000-count display
- Up to 0.09% basic DCV accuracy
- Longer battery life up to 400 hours<sup>3</sup>
- Certified to IP 67 for water and dust protection<sup>3</sup>
- Tested to withstand a 3-meter (10-ft) drop<sup>3</sup>
- CAT III 1000 V / CAT IV 600 V overvoltage protection
- Special features:
  - Harmonic ratio<sup>2</sup> measurement to quickly identify the presence of harmonics in AC signals
  - $Z_{LOW}$ , low impedance mode<sup>1</sup> to eliminate false readings caused by stray voltages
  - Vsense<sup>1</sup> for non-contact voltage detection
  - T1 – T2 differential temperature<sup>2</sup> measurement
  - Built-in flashlight<sup>3</sup>
- For Keysight Remote Link solution, add optional Infrared (IR)-to-*Bluetooth* adapter to get instant wireless *Bluetooth* connection<sup>4</sup>



1. U1242C only
2. U1242B & U1242C only
3. U1240C Series only
4. Additionally, the U1240B Series also requires the U1179A IR connectivity bracket.

# Test Confidently and Efficiently

## Harmonics ratio

In real life, harmonics are present in AC power due to the fact that many electronic devices are powered by switched mode current pulses which travel back into the power source. If these unwanted harmonics become too large, the undesirable side effects include: overheating that shortens the lifespan of motors, generators and transformers, premature tripping of circuit breakers, and blown fuses. One of the fastest ways to detect and gauge the percentage of distortion due to harmonics is by measuring the harmonic ratio of the incoming AC voltage. You can perform this very easily on the U1242B/C handheld DMM, with just a button press. The percentage helps you to decide if further analysis of the power source is required with an oscilloscope or a spectrum analyzer.

## Low impedance mode ( $Z_{low}$ )

Stray voltages are usually encountered in non-energized electrical wiring adjacent to powered wires due to capacitive or inductive coupling between these wires. The low impedance mode helps to reduce false readings by dissipating these stray voltages thus improving safety and measurement efficiency during voltage measurement.

## Vsense for non-contact voltage detection

Vsense is a unique method of non-contact voltage detection that safeguards users from exposure to hot or live wires while making measurements in dangerous working environments. Upon detection of high AC voltage, it produces a unique combination of beeping audio and blinking LED light to alert users.

## Dual and differential temperature

In the installation, maintenance and troubleshooting of heating, ventilation and air-conditioning (HVAC) systems, temperature measurements are essential. As an example, to ensure boiler temperature adheres to safety requirements, you would need to measure both boiler and air temperature simultaneously to achieve accurate real-time readings. With a faulty air conditioning system, viewing the temperature difference between warm return air and cool air supply helps to reveal the cooling behavior of the evaporator with respect to time. Now with the convenience of the U1242B/C DMM, you need only one instrument to efficiently get dual and differential measurements.

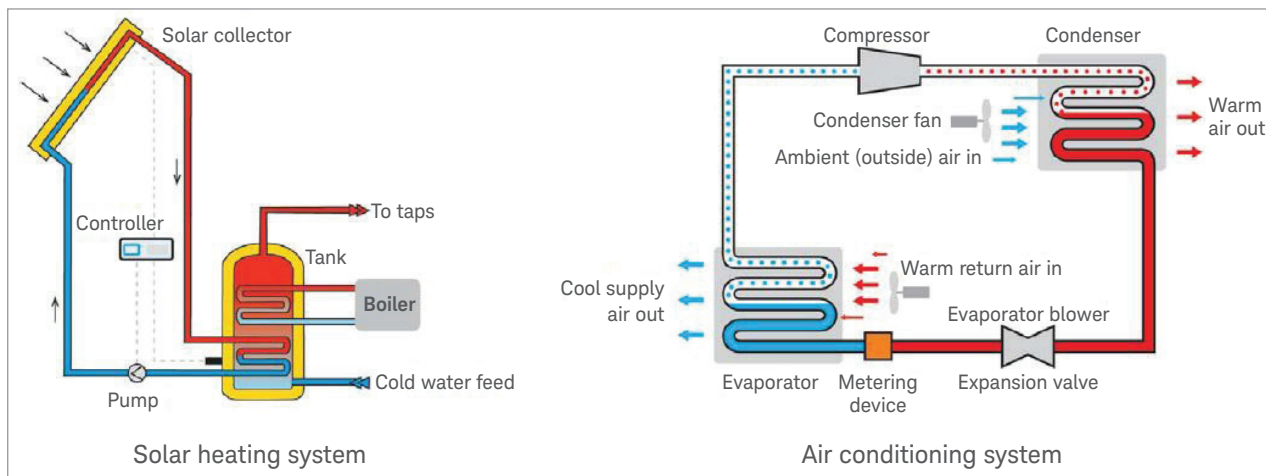


Figure 1. Dual and differential temperature for efficient testing of HVAC systems

## Built-in flashlight with ergonomics in mind

Designed for handheld users working in poorly lit environments, the U1240C Series fits comfortably in your palm allowing you to single-handedly illuminate the test area with its easily activated built-in LED flashlight. With ergonomics in mind, you can swiftly make more measurements without straining your hands even over a longer period of time.



Figure 2. Ergonomically shaped with a built-in flashlight

## Prolonged battery life and rugged build

The last thing you want is for your tools to run out of juice when you need it the most. The U1240C Series of handheld DMMs lets you carry out test and measurements over a prolonged duration. With up to 400 hours of battery life, you don't have to worry about the hassles of battery change, and just focus on maximum productivity.

When operating in harsh environments, you need tools which are strong and solid enough to stand up to the task. The U1240C Series DMMs are housed in robust overmold enclosures and certified to IP 67 for dust and water resistance. Better yet, it is also designed to absorb the impact of a 3-meter (10-foot) drop — especially useful in case of accidental drops during installation and maintenance work.

## Perform data logging on-DMM, wired or wirelessly

Keep the production lines running smoothly with the U1240 Series DMMs' data logging capabilities. Users have two options to record individual readings. The first option is to simply record data into the main DMM unit by utilizing the built-in internal memory of up to 2,000 readings storage. The second option is to transmit data to a PC with the IR-USB cable utilizing the Keysight Handheld Meter Logger software or to do so wirelessly with the optional Keysight Remote Link solution. With this capability, you can ensure every reading gets recorded accurately at intervals you specify. Better yet, you can eliminate the conventional data entering process and generate error-free automated test reports in various forms such as graph, table, and statistical information or limit test results.



Figure 3. Easily capture test readings with the Keysight Handheld Meter Logger software



Figure 4. U1240C Series is compatible with Keysight Remote Link solution to safely measure, view and log test measurements

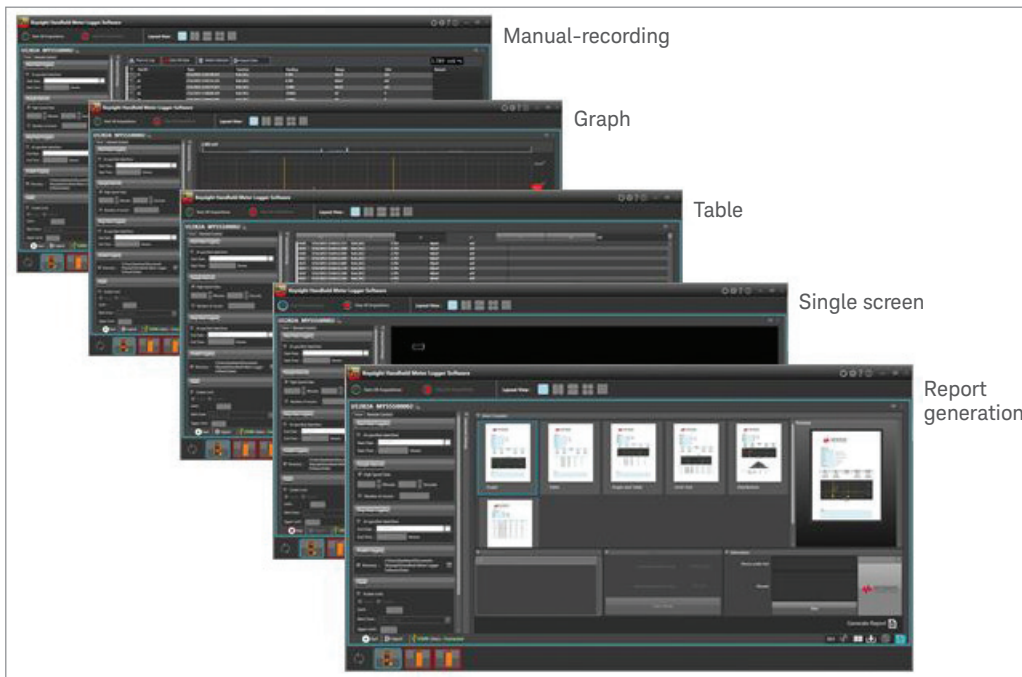


Figure 5. Get automatic report generated in various formats via PDF

# Take a Closer Look at the U1240C Series

## Front panel

10,000-count dual display

Data logging:  
 - Manual data logging up to 100 readings, or,  
 - Auto/event data logging up to 2,000 readings

Harmonics ratio\* to detect the presence of harmonics content

Z<sub>LOW</sub> (low input impedance)\* to remove ghost or induced voltage from your measurement

Vsense\* red LED indicator for non-contact voltage detection

Press-and-hold to switch on the built-in flashlight

T1-T2 differential temperature\* measurement

Broad range of measurement functions: voltage, current, frequency, capacitance, resistance, continuity, diode test and temperature

CAT IV 600 V CAT III 1000 V overvoltage protection

\* U1242C only

## Back panel

Built-in flashlight

Probe holder/storage

IR-USB connectivity

Easy access to battery and fuse compartment

Ergonomically designed for better grip

# Take a Closer Look at the U1240B Series

## Front panel



## U1240C Series Comparison

<b>Basic features</b>		<b>U1241C</b>	<b>U1242C</b>
Display resolution		10,000	10,000
Auto/manual ranging		Yes	Yes
Analog bar graph		Yes	Yes
Backlight		Yes	Yes
AC bandwidth		2 kHz	2 kHz
True RMS		AC	AC (Switchable to averaging sense)
<b>Measurements</b>			
Voltage DC	Range	100 mV to 1000 V	100 mV to 1000 V
	Accuracy	0.09% + 2 cnts	0.09% + 2 cnts
Voltage AC	Range	100 mV to 1000 V	100 mV to 1000 V
	Accuracy	1.0% + 3 cnts	1.0% + 3 cnts
Current DC	Range	1000 $\mu$ A to 10 A	1000 $\mu$ A to 10 A
	Accuracy	0.1% + 2 cnts	0.1% + 2 cnts
Current AC	Range	1000 $\mu$ A to 10 A	1000 $\mu$ A to 10 A
	Accuracy	1% + 3 cnts	1% + 3 cnts
Resistance	Range	1000 $\Omega$ to 100 M $\Omega$	100 $\Omega$ to 100 M $\Omega$
	Accuracy	0.2% + 2 cnts	0.2% + 2 cnts
Frequency	Range	100 Hz to 10 MHz	100 Hz to 10 MHz
	Accuracy	0.02% + 1 cnts	0.02% + 1 cnts
Capacitance	Range	1000 nF to 10 mF	1000 nF to 10 mF
	Accuracy	1% + 5 cnts	1% + 5 cnts
Temperature (K-type thermocouple)	Range	-200°C to 1372°C	-200°C to 1372°C
	Accuracy	1% + 1°C	1% + 1°C
Continuity with beeper		Yes	Yes
Diode test		Yes	Yes
<b>Data management</b>			
Min/Max recording		Yes	Yes
Display hold		Yes	Yes
Auto hold		Yes	Yes
Null		Yes	Yes
PC-Connectivity		Infrared (IR)-USB; IR-Bluetooth (optional)	Infrared (IR)-USB; IR-Bluetooth (optional)
<b>Special features</b>			
Harmonic ratio		–	Yes
Vsense: non-contact voltage detection		–	Yes
Z <sub>LOW</sub> - low impedance mode		–	Yes
T1 - T2 differential temperature measurement		–	Yes
<b>Safety and regulatory</b>			
Over-voltage safety protection		CAT III 1000 V / CAT IV 600 V	CAT III 1000 V / CAT IV 600 V
EN/IEC 61010-2-030: 2010 compliance		Yes	Yes
EN/IEC 61010-1: 2010 compliance		Yes	Yes
<b>General</b>			
Operating temperature		-20°C to 55°C 0% to 80% R.H.	-20°C to 55°C 0% to 80% R.H.
Battery (included)		4 x 1.5 V AAA	4 x 1.5 V AAA
Battery life		400 hours	400 hours
Warranty		3-year	3-year
Calibration		One year, or; Two years (with 1.5 times of one year specification)	One year, or; Two years (with 1.5 times of one year specification)
Dimensions (H x W x D)		198 x 96 x 57 mm	198 x 96 x 57 mm



## U1240C Series General Specifications

<b>Display</b>	4 ½-digit liquid crystal display (LCD) with maximum reading of 11,000-count Automatic polarity indication
<b>Power consumption</b>	530 mVA maximum with backlight and flashlight.
<b>Battery type</b>	4x 1.5 V AA alkaline batteries (ANSI/NEDA 24A or IEC LR03), or; 4x 1.5 V AA zinc chloride batteries (ANSI/NEDA 24D or IEC R03), or; 4x 1.5 V AA lithium batteries (ANSI/NEDA 24-LF or IEC FR03)
<b>Battery life</b>	400 hours typical based on new alkaline batteries for DC voltage measurement
<b>Connectivity</b>	Infrared (IR) port, connect with: <ul style="list-style-type: none"> <li>– IR-USB cable, or;</li> <li>– U1117A IR-to-<i>Bluetooth</i> adapter (<i>Bluetooth</i> Class 1), or;</li> <li>– U1177A IR-to-<i>Bluetooth</i> adapter (<i>Bluetooth</i> Class 2)</li> </ul>
<b>Fuse</b>	10 x 35 mm, 440 mA / 1000 V, 10 kA minimum fast-acting fuse 10 x 38 mm, 11 A / 1000 V, 20 kA minimum fast-acting fuse
<b>Operating environment</b>	Full accuracy from -20°C to 55°C; and up to 80% R.H. for temperature up to 30°C decreasing linearly to 50% R.H. at 55°C Pollution degree II Altitude up to 3000 meters
<b>Storage compliance</b>	-40 OC to 70°C, 0 to 80% R. H. (with battery removed)
<b>Safety compliance</b>	IEC 61010-1:2010 / EN 61010-1:2010, IEC 61010-2-033:2012 / EN 61010-2-033:2012 Canada: CAN/CSA-C22.2 No.61010-1-12, CAN/CSA-C22.2 No. 61010-2-033-12 USA: ANSI/UL Std. No. 61010-1 (3rd Edition), ANSI/UL Std. No. 61010-2-033 (1st Edition)
<b>Measurement category</b>	CAT III 1000 V / CAT IV 600 V
<b>Electromagnetic compatibility (EMC)</b>	Commercial limits compliance with EN61326-1 Influence of radiated immunity: In RF electromagnetic fields of 3 V/M DC voltage measurement typical accuracy: 100 mV & 600 mV range; ±0.1% of range DC current measurement typical accuracy: 1000 uA & 10 mA range; ±0.3% of range 10 A range; ±0.7% of range Note: If used in close proximity to an RF transmitter or when subjected to continuously present electromagnetic phenomena, some recoverable degradation of performance may occur.
<b>Ingress protection rating</b>	IP-67, protected against dust and the effect of immersion between 15 cm and 1 m
<b>Temperature coefficient</b>	0.05 x (specified accuracy)/°C (from -20°C to 18°C or 28°C to 55°C)
<b>Common mode rejection ratio (CMRR)</b>	> 120 dB at DC, 50/60 Hz ±0.1% (1 kΩ unbalanced)
<b>Normal mode rejection ratio (NMRR)</b>	> 60 dB at 50/60 Hz ±0.1%
<b>Dimensions (H x W x D)</b>	198 x 96 x 57 mm
<b>Weight</b>	545 grams (with batteries)
<b>Warranty</b>	Three years for main unit. Three months for standard shipped accessories
<b>Calibration cycle</b>	One year, or; Two years (with 1.5 times of one year specification)

### Specification assumptions

- Accuracy is given as ±(% of reading + counts of least significant digit) at 23°C ±5°C, with relative humidity less than 80% R.H.
- Accuracy is specified for 1-year after calibration, at operating temperature of room temperature. Multiply 1.5 times of the accuracy for 2-year after calibration, example ±(1.5 x% of reading + 1.5 x counts of least significant digit).
- AC V/mV and AC μA/mA/A specifications are AC coupled.
- True RMS measurement is valid from 5% of range to 100% of range.
- For non-sinusoidal waveforms, add (0.5% of reading +0.3% of full scale) typically
- Crest factor ≤ 3 at full-scale, and decrease reciprocally for overrange as 3× Full Scale/Input; except for the 100 mV, 600 mV and 1000 V ranges, where these ranges has crest factor ≤ 1.5 at full scale, and decrease reciprocally for overrange as 1.5× Full Scale/Input.
- Specification is based on 5 times/second of data refresh rate
- CMRR and NMRR are based on 5 times/second of data refresh rate
- After Z<sub>LOW</sub> voltage measurement, wait for at least 20 minutes to cool down thermal impact before making next measurement.

## U1240C Series DC Specifications

Function	Range	Resolution	Accuracy ±(% of reading + counts of least significant digit)	Test current / burden voltage
Voltage	100 mV <sup>1,3</sup>	0.01 mV	0.09% + 2	–
	600 mV <sup>1,3</sup>	0.1 mV	0.09% + 2	–
	1000 mV <sup>4</sup>	0.1 mV	0.09% + 2	–
	10 V <sup>4</sup>	0.001 V	0.09% + 2	–
	100 V <sup>4</sup>	0.01 V	0.09% + 2	–
	1000 V <sup>4</sup>	0.1 V	0.09% + 2	–
	Z <sub>LOW</sub> <sup>2,4</sup> (applicable to 1000 V range)	0.1 V	1% + 4	–
Current <sup>5</sup>	1000 µA <sup>3</sup>	0.1 µA	0.1% + 2	0.032 V (30 Ω)
	10 mA <sup>3</sup>	0.001 mA	0.1% + 2	0.32 V (30 Ω)
	100 mA <sup>1,3</sup>	0.01 mA	0.2% + 2	0.2 V (0.5 Ω)
	600 mA <sup>1,3</sup>	0.1 mA	0.2% + 2	0.88 V (0.5 Ω)
	10 A <sup>2,4</sup>	0.001 A	0.3% + 5	0.5 V (0.01 Ω)
Diode test	–	0.001 V	0.5% + 10	< 1.6 mA

Function	Range	Resolution	Accuracy ±(% of reading + counts of least significant digit)	Continuity threshold
Resistance / audible continuity	100 Ω <sup>3,4,7</sup>	0.01 Ω	0.2% + 5	28 ±10 Ω
	1000 Ω <sup>4</sup>	0.1 Ω	0.2% + 2	28 ±10 Ω
	10 kΩ	0.001 kΩ	0.2% + 2	0.151 ±0.05 kΩ
	100 kΩ	0.01 kΩ	0.2% + 2	1.38 ±0.5 kΩ
	1000 kΩ	0.1 kΩ	0.2% + 2	13.8 ±4.3 kΩ
	10 MΩ <sup>5</sup>	0.001 MΩ	0.8% + 2	0.12 ±0.04 MΩ
	100 MΩ <sup>5,6</sup>	0.01 MΩ	1.5% + 3 (<50 MΩ) 3.0% + 3 (>50 MΩ)	0.12 ±0.04 MΩ

## Notes for DC specifications

### A. Notes for voltage specification.

- 100 mV and 600 mV ranges available on Temperature T1 terminal. The accuracy is specified for 10 MΩ (nominal) input impedance. The accuracy is specified after NULL function is used to zero out thermal effect (by shorting test leads).
- Only available in U1242C only. 1.8 kΩ nominal input impedance for Z<sub>LOW</sub> mode.
- Overload protection for 100 mV and 600 mV ranges: 1000 Vrms for circuits < 0.3 A short circuit current.
- Overload protection: 1000 Vrms.

### B. Notes for current specification

- Current can be measured up to 440 mA continuously. Maximum of 20 hours for measuring current more than 440 mA and up to 600 mA. 100 mA and 600 mA ranges have thermal effect of 0.35 µA/mA to be offset after current applied to these ranges. Cool down the meter for at least 6 seconds if 100 mA was applied, and at least 3 minutes if 600 mA was applied; or alternatively use the NULL function to zero-out thermal effect with open test lead before measuring the signal.
- Current can be measured up to 10 A continuously. Maximum of 30 seconds for measuring current more than 10 A to 20 A, add 0.3% to specified accuracy. The multimeter needs to be cool down after measuring current that is more than 10 A. Cool down the meter for twice the duration of the measured time and use NULL function to zero-out thermal effect before proceeding with lower current measurement.
- 1000 µA to 600 mA ranges (connection with mA terminal) overload protection by 10 x 35 mm, 440 mA/1000 V, and 10 kA minimum fast-acting fuse.

- 10 A ranges (connection with A terminal) overload protection by 10 x 38 mm, 11 A / 1000 V, 20 kA minimum fast-acting fuse.
- Ensure good ventilation and no heat element close to the meter.

### C. Notes for diode test specification

- Overload protection: 1000 Vrms for circuits < 0.3 A short circuit current.
- Built-in buzzer sounds when reading is below 0.05 V approximately, and single tone for normal forward-biased diode or semiconductor junction as 0.3 V ≤ reading ≤ 0.8 V.
- The maximum threshold voltage display is less than +2 V.

### D. Notes for resistance/audible Continuity specification

- Maximum open voltage: < +2.4 V
- Built-in buzzer sounds as transient when resistance less than 28 ±10 Ω. It may capture the intermittent for longer than 1 ms.
- 100 Ω range is for U1242C only
- The accuracy is specified after Math Null, which is used to subtract the test lead resistance and the thermal effect. Ensure good ventilation and no heat element close to the meter.
- For 10 MΩ and 100 MΩ ranges, the R.H. is specified for < 60% at 30°C.
- For 100 MΩ range: temperature coefficient is 0.1 x (specified accuracy) /°C.
- Resistance range 100 Ω is typical characteristic.

## U1240C Series AC Voltage Specifications

Function	Range	Resolution	Accuracy $\pm$ (% of reading + counts of least significant digit)	
			40 Hz to 1 kHz	1 kHz to 2 kHz
AC voltage <sup>1,4</sup> True RMS	100 mV <sup>2</sup>	0.01 mV	1.0% + 3	1.5% + 3
	600 mV <sup>2</sup>	0.1 mV	1.0% + 3	1.5% + 3
	1000 mV	0.1 mV	1.0% + 3	1.5% + 3
	10 V	0.001 V	1.0% + 3	1.5% + 3
	100 V	0.01 V	1.0% + 3	1.5% + 3
	1000 V	0.1 V	1.0% + 3	1.5% + 3
	Z <sub>LOW</sub> <sup>3</sup> (applicable to 1000 V range)	0.1 V	2.0% + 4	N/A
AC voltage <sup>1,4</sup> Averaging sense	100 mV <sup>2</sup>	0.01 mV	1.0% + 5	1.5% + 5
	600 mV <sup>2</sup>	0.1 mV	1.0% + 5	1.5% + 5
	1000 mV	0.1 mV	1.0% + 5	1.5% + 5
	10 V	0.001 V	1.0% + 5	1.5% + 5
	100 V	0.01 V	1.0% + 5	1.5% + 5
	1000 V	0.1 V	1.0% + 5	1.5% + 5

1. Overload protection: 1000 Vrms.
2. 100 mV and 600 mV ranges available on Temperature T1 terminal. The accuracy is specified for 10 M $\Omega$  (nominal) input impedance. The accuracy is specified after NULL function is used to zero out thermal effect (by shorting test leads).
3. Only available in U1242C only. 1.8 k $\Omega$  nominal input impedance for Z<sub>LOW</sub> mode.
4. The input signal is lower than the product of 20,000,000 V x Hz.

## U1240C Series AC Current Specifications

Function	Range	Resolution	Accuracy $\pm$ (% of reading + counts of least significant digit)	
			40 Hz to 1 kHz (True RMS)	40 Hz to 1 kHz (Averaging sense) <sup>6</sup>
AC current <sup>5</sup>	1000 $\mu$ A <sup>3</sup>	0.1 $\mu$ A	1.0% + 3	1.2% + 5
	10 mA <sup>3</sup>	0.001 mA	1.0% + 3	1.2% + 5
	100 mA <sup>3</sup>	0.01 mA	1.0% + 3	1.2% + 5
	1000 mA <sup>1,3</sup>	0.1 mA	1.0% + 3	1.2% + 5
	10 A <sup>2,4</sup>	0.001 A	1.2% + 5 <sup>4</sup>	1.2% + 5

1. Current can be measured up to 440 mA continuously. Maximum of 20 hours for measuring current more than 440 mA and up to 600 mA. 100 mA and 600 mA ranges have thermal effect of 0.35  $\mu$ A/mA to be offset after current applied to these ranges. Cool down the meter for at least 6 seconds if 100 mA was applied, and at least 3 minutes if 600 mA was applied; or alternatively use the NULL function to zero-out thermal effect with open test lead before measuring the signal.
2. Current can be measured up to 10 A continuously. Maximum of 30 seconds for measuring current more than 10 A to 20 A, add 0.3% to specified accuracy. The multimeter needs to be cool down after measuring current that is more than 10 A. Cool down the meter for twice the duration of the measured time and use NULL function to zero-out thermal effect before proceeding with lower current measurement.
3. 1000  $\mu$ A to 1000 mA ranges (connection with mA terminal) overload protection by 10 x 35 mm, 440 mA / 1000 V, 10 kA minimum fast-acting fuse.
4. 10 A ranges (connection with A terminal) overload protection by 10 x 38 mm, 11 A / 1000 V, 20 kA minimum fast-acting fuse.
5. Ensure good ventilation and no heat element close to the meter.
6. The averaging sense is calibrated for sine wave only. Add additional 0.05 counts / $^{\circ}$ C to accuracy from -20  $^{\circ}$ C to 18  $^{\circ}$ C or -28 $^{\circ}$ C to 55 $^{\circ}$ C.

## U1240C Series Temperature Specifications

Thermal type	Range	Resolution	Accuracy $\pm$ (% of reading + as specified below)
K	-200°C to 1372°C	0.1°C	1% + 1°C
	-328°F to 2502°F	0.1°F	1% + 1.8°F
J <sup>5</sup>	-210°C to 1200°C	0.1°C	1% + 1°C
	-346°F to 2192°F	0.1°F	1% + 1.8°F

1. The specification above is specified after 60 minutes of warm-up time.
2. The accuracy does not include the tolerance of the thermocouple probe.
3. Do not allow the temperature sensor to contact a surface that is energized above 30 Vrms or 60 V DC. Such voltages pose a shock hazard.
4. The temperature calculation is specified according to the safety standards of EN/IEC-60548-1 and NIST 175.
5. Only for U1242C.

## U1240C Series Capacitance Specifications

Range	Resolution	Accuracy $\pm$ (% of reading + counts of least significant digit)
1000 nF	0.1 nF	1.0% + 5
10 $\mu$ F	0.001 $\mu$ F	1.0% + 5
100 $\mu$ F	0.01 $\mu$ F	1.0% + 5
1000 $\mu$ F	0.01 $\mu$ F	1.2% + 5
10 mF	0.001 mF	1.2% + 5

1. Overload protection: 1000 Vrms for short circuits with < 0.3 A current.
2. The accuracy for all ranges is specified based on a film capacitor or better, and after the Null function is used to subtract the test lead resistance and thermal effect (by opening the test leads).
3. The maximum display is 12000 counts selectable

## U1240C Series Frequency Specifications

Range	Resolution	Accuracy $\pm$ (% of reading + counts of least significant digit)	Minimum input frequency
100.00 Hz	0.01 Hz	0.02% + 1 <sup>1</sup>	0.5 Hz
1000.0 Hz	0.1 Hz	0.02% + 1	
10.000 kHz	0.001 kHz	0.02% + 1	
100.00 kHz	0.01 kHz	0.02% + 1	
1000.0 kHz	0.001 kHz	0.02% + 1	
10.000 MHz	0.001 MHz	0.02% + 1, < 1 MHz	

1. The frequency measurement is susceptible to error when measuring low-voltage, low-frequency signals. Shielding inputs from external noise pickup is critical for minimizing measurement errors. Turning on LPF (low pass filter) may help to filter out the noise and achieve a stable reading

## U1240C Series Sensitivity for Voltage Measurement

Input range	Minimum sensitivity (RMS sine wave)		
	0.5 Hz to 20 kHz	20 kHz to 50 kHz	50 kHz to 100 kHz
Maximum input <sup>1</sup> for specified accuracy			
100 mV <sup>2</sup>	15 mV	7.2 mV	15 mV
600 mV <sup>2</sup>	15 mV	7.2 mV	15 mV
1000 mV	125 mV	60 mV	125 mV
10 V	1.25 V	0.6 V	1.25 V
100 V	12.5 V	6 V	12.5 V
1000 V	60 V	60 V	60 V

## U1240C Series Sensitivity for Current Measurement

Input range	Minimum sensitivity (RMS sine wave)	
	0.5 Hz to 20 kHz	20 kHz to 30 kHz
Maximum input <sup>1</sup> for specified accuracy		
100 $\mu$ A	175 $\mu$ A	60 $\mu$ A
10 mA	1.75 mA	0.6 mA
100 mA	17.5 mA	6.0 mA
600 mA	100 mA	38 mA
10 A	N/A	1.15 A (< 10 kHz)

1. Refer to 'AC specification' for specified accuracy of maximum input.
2. 100 mV and 600 mV ranges available on Temperature T1 terminal.

## U1240C Series Harmonic Ratio (U1242C only)

Range	Frequency	Voltage
0.0% to 99.9%	40 Hz to 1 kHz	100 mVAC to 1000 VAC

## U1240C Series Multimeter Data Refresh Rate

Function	Slow (times/second)	Fast (times/second)
ACV (V or mV)	5	40
DCV (V or mV)	5	40
$\Omega$	5	40
Diode	5	40
Auto diode	1	
Capacitance	0.8 (<1000 $\mu$ F)	–
DC $\mu$ A, mA or A	5	40
AC $\mu$ A, mA or A	5	40
Temperature	5	40
Frequency	1 (>10 Hz)	–

## U1240B Series DC Specifications

Function	Range	Resolution	Test current/ burden voltage	Accuracy $\pm$ (% of reading + counts of least significant digit)
Voltage <sup>1</sup>	1000.0 mV	0.1 mV	–	0.09% + 5
	10.000 V	0.001 V	–	0.09% + 2
	100.00 V	0.01 V	–	
	1000.0 V	0.1 V	–	0.15% + 5
Current	1000.0 $\mu$ A	0.1 $\mu$ A	< 0.06 V (50 $\Omega$ )	0.1% + 3
	10000 $\mu$ A	1 $\mu$ A	< 0.55 V (50 $\Omega$ )	0.1% + 3
	100.00 mA	0.01 mA	< 0.18 V (0.5 $\Omega$ )	0.2% + 3
	440.0 mA <sup>2</sup>	0.1 mA	< 0.8 V (0.5 $\Omega$ )	0.5% + 3
	10.000 A <sup>3</sup>	0.001 A	< 0.4 V (0.01 $\Omega$ )	0.6% + 5
Resistance <sup>4</sup>	1000.0 $\Omega$ <sup>5</sup>	0.1 $\Omega$	0.5 mA	0.3% + 3
	10.000 k $\Omega$ <sup>5</sup>	0.001 k $\Omega$	50 $\mu$ A	
	100.00 k $\Omega$	0.01 k $\Omega$	4.91 $\mu$ A	
	1000.0 k $\Omega$	0.1 k $\Omega$	447 nA	
	10.000 M $\Omega$	0.001 M $\Omega$	112 nA	0.8% + 3
	100.00 M $\Omega$ <sup>6</sup>	0.01 M $\Omega$	112 nA	1.5% + 3
Diode test <sup>7</sup>	1 V	0.001 V	approximately 0.5 mA	0.3% + 2

- Input impedance: 10 M $\Omega$  (nominal).
- Current can be measured up to 440 mA continuously. An additional 0.2% needs to be added to the specified accuracy if the signal measured is in the range of 440 mA to 1100 mA for 30 seconds maximum. After measuring a current of > 440 mA, leave the meter to cool down for twice the measuring time used before applying a low current measurement.
- Current can be measured up to 10 A continuously with a maximum operating temperature of 50°C. An additional 0.3% needs to be added to the specified accuracy if the signal measured is in the range of 10 A to 19.999 A for 15 seconds maximum. After measuring a current of > 10 A, leave the meter to cool down for 60 seconds before applying a low current measurement.
- The maximum open voltage is < 2.8 V. For instant continuity, the built-in buzzer sounds when resistance is < 10.0  $\Omega$ .
- The accuracy of 1 k $\Omega$  and 10 k $\Omega$  is specified after Null function, which is used to substrate the test lead resistance and the thermal effect.
- For the range of 100 M $\Omega$ , the R.H. is specified for < 60%. The temperature coefficient will be 0.15 times of specified accuracy as > 50 M $\Omega$ .
- Overload protection: 1000 V RMS for circuits < 0.3 A short circuit current. The built-in buzzer sounds when reading is approximately below 50 mV and audible single tone for normal forward biased diode or semiconductor junction as  $0.3 \text{ V} \leq \text{Reading} \leq 0.8 \text{ V}$ .

## U1240B Series AC Specifications

Function	Range	Resolution	Test current/ burden voltage	Accuracy $\pm$ (% of reading + counts of least significant digit)		
				40 to 500 Hz	500 Hz to 1 kHz	1 to 2 kHz
AC voltage <sup>1,5</sup> True RMS	1000.0 mV	0.1 mV	–	1% + 5	2% + 5	–
	10.000 V	0.001 V	–	1% + 5	1% + 5	2% + 5
	100.00 V	0.01 V	–	1% + 5	1% + 5	2% + 5
	1000.0 V	0.1 V	–	1% + 5	1% + 5	–
AC current <sup>2,5</sup> True RMS	1000.0 $\mu$ A	0.1 $\mu$ A	< 0.06 V (50 $\Omega$ )			
	10000 $\mu$ A	1 $\mu$ A	< 0.55 V (50 $\Omega$ )			
	100.00 mA	0.01 mA	< 0.18 V (0.5 $\Omega$ )	1% + 5	1% + 5	–
	440.0 mA <sup>3</sup>	0.1 mA	< 0.8 V (0.5 $\Omega$ )			
	10.000 A <sup>4</sup>	0.001 A	< 0.4 V (0.01 $\Omega$ )			

1. Input impedance: 10 M $\Omega$  (nominal) in parallel with < 100 pF, with overload protection of 1000 V RMS.
2. Crest factor  $\leq$  3 at full-scale, and decrease reciprocally for overrange as  $3 \times$  Full Scale/Input; except for the 1000 V range, where this range has crest factor  $\leq$  1.5 at full scale, and decrease reciprocally for overrange as  $1.5 \times$  Full Scale/Input. For non-sinusoidal waveforms, add (2% of reading + 2% of full scale) typical.
3. Current can be measured from 50 mA to 440 mA continuously. An additional 0.2% needs to be added to the specified accuracy if the signal measured is in the range of 440 mA to 1100 mA for 30 seconds maximum. After measuring a current of > 440 mA, leave the meter to cool down for twice the measuring time used before application of low current measurement.
4. Current can be measured from 0.5 A up to 10 A continuously with a maximum operating temperature of 50°C. An additional 0.3% needs to be added to the specified accuracy if the signal measured is in the range of 10 A to 19.999 A for 15 seconds maximum. After measuring a current of >10 A, leave the meter to cool down for 60 seconds before applying a low current measurement.
5. AC voltage and AC current specifications are AC coupled. True RMS measurement is valid from 5% of range to 100% of range.

## U1240B Series Temperature Specifications

Thermocouple type	Range	Resolution	Accuracy $\pm$ (% of reading + offset error)
K (for U1241B and U1242B)	–40 to 1000 °C/–48 to 1832 °F	0.1°C /0.1°F	1% + 1 °C/1% + 1.8°F
J (for U1242B only)	–40 to 1000 °C/–48 to 1832 °F	0.1 °C/0.1 °F	1% + 1 °C/1% + 1.8°F

## U1240B Series Capacitance Specifications

Range	Resolution	Accuracy $\pm$ (% of reading + counts of least significant digit)
1000.0 nF	0.1 nF	
10.000 $\mu$ F	0.001 $\mu$ F	1.2% + 4
100.00 $\mu$ F	0.01 $\mu$ F	
1000.0 $\mu$ F	0.1 $\mu$ F	2% + 4
10.000 mF	0.001 mF	

## U1240B Series Harmonic Ratio Specifications

Range	Frequency	Voltage
0.0% to 99.9%	40 to 500 Hz	100 mVAC to 1000 VAC

## U1240B Series Switch Counter Definition

Switch condition <sup>1,2</sup>	Circuit switch	Display <sup>3</sup>	Switch threshold
Low level	Normally close	Lo	< 370 ohms
Intermittent <sup>4</sup>	Close to open	Number of switch count	Low to high transition
High level	Normally open	Hi	> 430 ohms
Intermittent <sup>5</sup>	Open to close	Number of switch count	High to low transition

1. Detects intermittent Opens or Closes lasting for at least 250  $\mu$ sec.
2. Test current of 0.5 mA with maximum open circuit voltage of 2.8 V is used.
3. Maximum count reading: 199.99 M (display "OL" when achieving  $2 \times 10^8$  and thereafter).
4. Count only low to high transition for initial switch condition of Low.
5. Count only high to low transition for initial switch condition of High.

## U1240B Series Frequency Specifications

Range	Resolution	Accuracy	Minimum input frequency
100.00 Hz	0.01 Hz	0.03% + 3	1 Hz
1000.0 Hz	0.1 Hz		
10.000 kHz	0.001 kHz		
100.00 kHz	0.01 kHz		
1000.0 kHz <sup>1</sup>	0.1 kHz		

1. Effective frequency measurement of up to 200 kHz; refer to frequency sensitivity table below for details.

## U1240B Series Frequency Sensitivity During Voltage Measurement

Input range (Maximum input for specified accuracy = 10 x Range or 1000 V)	Minimum sensitivity (RMS sine wave)	
	20 Hz to 50 kHz	50 to 200 kHz
1000.0 mV	0.3 V	0.6 V
10.000 V	0.5 V	1.8 V
100.00 V	5 V	10 V (< 100 kHz)
1000.0 V	50 V	100 V (< 100 kHz)

## U1240B Series Frequency Sensitivity During Current Measurement

Input range	Minimum sensitivity (RMS sine wave)
	20 Hz to 20 kHz
1000.0 $\mu$ A	100 $\mu$ A
10000 $\mu$ A	500 $\mu$ A
100.00 mA	10 mA
440.00 mA	50 mA
10.000 A	1 A



## U1240B Series Measuring Rate

Function	Times/second
ACV	7
DCV (V or mV)	7
$\Omega$	14
Diode	14
Capacitance	4 (< 100 $\mu$ F)
DCA ( $\mu$ A, mA, A)	7
ACA ( $\mu$ A, mA, A)	7
Temperature	7 (single)
Frequency	1 (> 10 Hz)

## U1240B Series General Specifications

<b>Display</b>	Dual display (secondary display is intended for temperature function display only) consists of 4-digit liquid crystal display (LCD) with maximum reading of 11,000 counts. Automatic polarity indication.
<b>Power consumption</b>	0.22 VA maximum
<b>Battery type and life</b>	Four single standard 1.5 V AAA batteries (Alkaline or Zinc Chloride type); 300 hours typical
<b>Operating environment</b>	Full accuracy at -10 to 55°C; and to 80% RH for temperatures up to 30°C, decreasing linearly to 50% RH at 55°C 0 – 2000 meters per IEC 61010-1 3rd edition CAT III, 1000 V/CAT IV, 600 V IEC 61010-1 3rd edition
<b>Storage compliance</b>	-20 to 70°C
<b>Safety compliance</b>	IEC 61010-1:2010 / EN 61010-1:2010, IEC 61010-2-033:2012 / EN 61010-2-033:2012 Canada: CAN/CSA-C22.2 No.61010-1-12, CAN/CSA-C22.2 No. 61010-2-033-12 USA: ANSI/UL Std. No. 61010-1 (3rd Edition), ANSI/UL Std. No. 61010-2-033 (1st Edition)
<b>Measurement category</b>	CAT III 1000 V/CAT IV 600 V Overvoltage Protection, Pollution Degree 2
<b>EMC compliance</b>	Commercial limits compliance with EN61326-1 Influence of radiated immunity: In RF electromagnetic fields of 3 V/M DC voltage measurement typical accuracy: 1000 mV to 1000 V range; $\pm 0.2\%$ of range DC current measurement typical accuracy: 1000 $\mu$ A & 10000 $\mu$ A range; $\pm 0.7\%$ of range 100 mA range; $\pm 0.22\%$ of range 440 mA range; $\pm 0.5\%$ of range 10 A range; $\pm 0.11\%$ of range Note: If used in close proximity to an RF transmitter or when subjected to continuously present electromagnetic phenomena, some recoverable degradation of performance may occur.
<b>Common mode rejection ratio (CMRR)</b>	> 90 dB at DC, 50/60 Hz $\pm 0.1\%$ (1 k $\Omega$ unbalanced)
<b>Normal mode rejection ratio (NMRR)</b>	> 60 dB at 50/60 Hz $\pm 0.1\%$
<b>Crest factor</b>	Crest factor $\leq 3$ at full-scale, and decrease reciprocally for overrange as $3 \times$ Full Scale/Input; except for the 1000 V range, where this range has crest factor $\leq 1.5$ at full scale, and decrease reciprocally for overrange as $1.5 \times$ Full Scale/Input.
<b>Temperature coefficient</b>	$0.1 \times$ (specified accuracy)/°C (from -10 to 18°C or 28 to 55°C)
<b>Shock and vibration</b>	Tested to IEC/EN 60068-2
<b>Dimensions (H x W x D)</b>	193.8 x 92.2 x 58.0 mm
<b>Weight</b>	450 g with batteries 400 g without batteries
<b>Warranty</b>	Three years for main unit. Three months for standard shipped accessories

## U1240B Series Ordering Information

### Standard shipped accessories

Four 1.5 V AAA alkaline batteries, Certificate of Calibration (CoC), test probe leads (4-mm tips), Quick Start Guide, free test data (Option UK6)



U1241B



U1242B

## U1240C Series Ordering Information

### Standard shipped accessories

Four 1.5 V AAA batteries, Certificate of Calibration (CoC), test leads, infrared (IR)-to-USB cable, Quick Start Guide



U1241C



U1242C

### Optional accessories

U1117A infrared(IR)-to-Bluetooth adapter

- Enable Bluetooth connection to Keysight handheld digital multimeters
- Up to 100 meter operating range



U1115A remote logging display

- Displays up to 4 Keysight handheld digital multimeters measurements
- 60,000 points interval logging
- Extend measurement distance of up to 100-meter



U1179A IR connectivity bracket

- Connects the U1240B Series handheld DMM to the IR-to-USB cable or IR-to-Bluetooth adapter



U1171A magnetic hanging kit

- For fastening the DMM to a steel surface so both hands are free



U1583B AC current clamp

- Dual range 40 A and 400 A
- BNC-to-banana plug adapter provided for use with handheld digital multimeters



## Optional accessories (continued)

### U1174A carrying case, soft

- For handheld digital multimeters



### U1172A transit case (aluminium-clad)

- The robust casing to transport your DMM and accessories
- Aluminum-clad, black panel construction
- Dimension: 18 inches (H) x 13 inches (W) x 6 inches (D)
- Weight: 4 kg



### U1595A rugged carrying case

- High quality, water and dust proof carrying case designed to store up to two handheld and accessories



### U1161A extended test lead kit

Includes two test leads (red and black), two test probes, medium sized alligator clips and 4-mm banana plugs.

- Test leads: CAT III 1000 V, CAT IV 600 V, 15 A
- Test probe (4-mm tips): CAT III 1000 V, CAT IV 600 V, 15 A
- Medium-sized alligator clips: CAT III 1000 V, CAT IV 600 V, 15 A
- 4-mm banana plugs: CAT II 600 V, 10 A



### U1168B standard test lead kit

Includes two test leads (red and black), 4-mm test probes, alligator clips, fine-tip test probes, SMT grabbers and mini grabbers.

- Test leads: CAT III 1000 V, CAT IV 600 V, 15 A
- Test probe (19-mm tips): CAT II 1000 V, 15 A
- Test probe (4-mm tips): CAT III 1000 V, CAT IV 600 V, 15 A (highly recommended for CAT IV environment)
- Alligator clips: CAT III 1000 V, CAT IV 600 V, 15 A
- Fine-tip test probes: CAT II 300 V, 3 A
- SMT grabber: CAT II 300 V, 3 A
- Mini grabber: CAT II 300 V, 3 A



### U1162A alligator clips

- One pair of insulated alligator clips (red and black). Recommended for use with Keysight standard test leads.
- Rated CAT III 1000 V, CAT IV 600 V, 15 A



### U1163A SMT grabbers

- One pair of SMT grabbers (red and black). Recommended for use with Keysight standard test leads.
- Rated CAT II 300 V, 3 A



## Optional accessories (continued)

### U1164A fine-tip test probes

- One pair of fine-tip test probes (red and black). Recommended for use with Keysight standard test leads.
- Rated CAT II 300 V, 3 A



### U1169A test probe leads

- Includes two test leads (red and black), and a pair each of 19-mm and 4-mm test probes.
- Test leads: CAT III 1000 V, CAT IV 600 V, 15 A
- Test probes (19-mm tip): CAT II 1000 V, 15 A
- Test probes (4-mm tip): CAT III 1000 V, CAT IV 600 V, 15 A (highly recommended for CAT IV environment)



### U1180A temperature sensors and probes

Includes thermocouple adapter, thermocouple bead J-type and thermocouple bead K-type.

- T/C adapter J/K type
- T/C bead J-type: -20 to 200°C
- T/C bead K-type: -20 to 200°C



### U1181A immersion temperature probe

- Type K T/C for use in oil and other liquids
- Measurement range: -50 to 700°C
- Includes adapter U1184A for connection to DMM



### U1182A industrial surface temperature probe

- Type K T/C for use on still surfaces
- Measurement range: -50 to 400°C
- Includes adapter U1184A for connection to DMM



### U1183A air temperature probe

- Type K T/C for use in air and non-caustic gas
- Measurement range: -50 to 800°C
- Includes adapter U1184A for connection to DMM



### Optional accessories (continued)


U1184A temperature probe adapter

- Mini-connector-to-banana-plug adapter for use with DMM



U1185A thermocouple (J-type) and temperature probe adapter

- T/C adapter J/K type
- T/C bead J-type: -20 to 200°C



U1186A thermocouple (K-type) and temperature probe adapter

- T/C adapter J/K type
- T/C bead J-type: -20 to 200°C

