


R&S®FSC

Spectrum Analyzer

Specifications

3 year
warranty

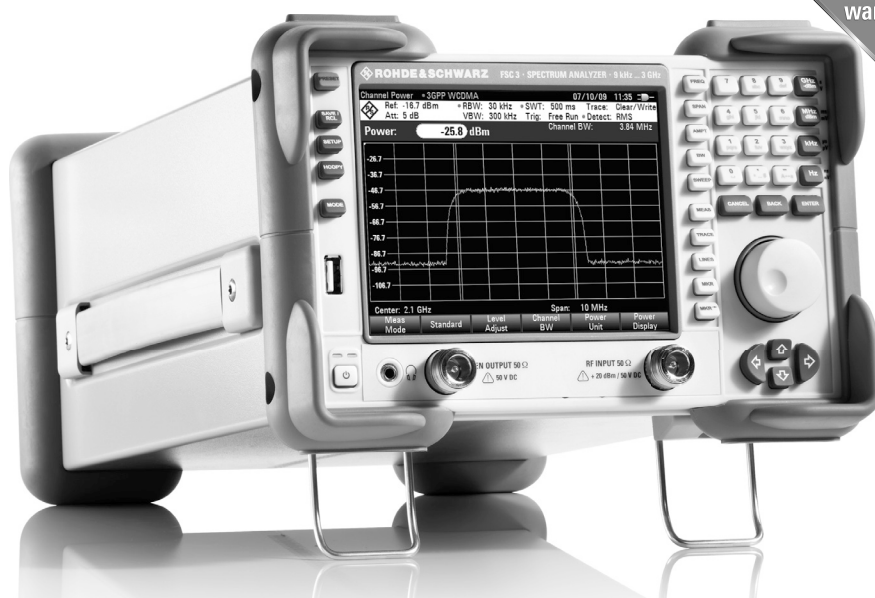

CONTENTS

Base unit.....	3
Frequency	3
Sweep time.....	3
Bandwidths.....	3
Level.....	4
Trigger functions.....	5
Tracking generator (model .13/.16 only)	6
Inputs and outputs	7
General data	8
Ordering information	9
Options.....	9
Recommended extras.....	10
Supported Power Sensors	11

Specifications apply under the following conditions:

15 minutes warm-up time at ambient temperature, specified environmental conditions met, calibration cycle adhered to.

Data without tolerances: typical values only. Data designated as “nominal” applies to design parameters and is not tested.

Base unit

Frequency

Frequency range	model .03/.13	9 kHz to 3 GHz
	model .06/.16	9 kHz to 6 GHz
Frequency resolution		1 Hz

Reference frequency, internal, nominal		
Aging per year		1×10^{-6}
Temperature drift	0 °C to +30 °C	1×10^{-6}
	+30 °C to +50 °C	3×10^{-6}
Achievable initial adjustment accuracy		5×10^{-7}
Total reference uncertainty		(time since last adjustment $\times$ aging rate) + temperature drift + calibration accuracy

Frequency readout		
Marker resolution		0.1 Hz
Uncertainty		$\pm(\text{marker frequency} \times \text{reference uncertainty} + 10 \% \times \text{resolution bandwidth} + \frac{1}{2} (\text{span}/(\text{sweep points} - 1)) + 1 \text{ Hz})$
Number of sweep (trace) points		631
Marker tuning frequency step size		span/630
Frequency counter resolution		0.1 Hz
Count uncertainty	S/N > 25 dB	$\pm(\text{frequency} \times \text{reference uncertainty} + \frac{1}{2} (\text{last digit}))$
Frequency span		
Span setting uncertainty		$\pm \text{span}/630$

Spectral purity, SSB phase noise	f = 500 MHz, carrier offset	
	30 kHz	< -95 dBc (1 Hz), typ. -105 dBc (1 Hz)
	100 kHz	< -100 dBc (1 Hz), typ. -110 dBc (1 Hz)
	1 MHz	< -120 dBc (1 Hz), typ. -127 dBc (1 Hz)

Sweep time

Sweep time	span = 0 Hz	200 μ s to 100 s
	$10 \text{ Hz} \leq \text{span} \leq 600 \text{ MHz}$	20 ms to 1000 s
	span > 600 MHz	$20 \text{ ms} \times \text{span}/600 \text{ MHz}$ to 1000 s
Uncertainty	span = 0 Hz	1 %, nominal
	span $\geq 10 \text{ Hz}$	3 %, nominal

Bandwidths

Resolution bandwidths		
Range	-3 dB bandwidth	10 Hz to 3 MHz in 1/3 sequence
Bandwidth accuracy	$10 \text{ Hz} \leq \text{RBW} \leq 300 \text{ kHz}$	< 5 %, nominal
	RBW > 300 kHz	< 10 %, nominal
Selectivity	60 dB:3 dB	< 5 (Gaussian type filters), nominal
Video filters		
Range	-3 dB bandwidth	10 Hz to 3 MHz in 1/3 sequence

Level

Display range		displayed noise floor to +30 dBm
Maximum rated input level with RF attenuation ≥ 10 dB		
DC voltage		50 V
CW RF power		30 dBm (= 1 W)
Peak RF power	< 3 s duration	33 dBm (= 2 W)
Max. pulse voltage		150 V
Max. pulse energy	pulse width 10 μ s	10 mWs
Maximum rated input level with RF attenuation < 10 dB		
DC voltage		50 V
CW RF power		20 dBm (= 100 mW)
Peak RF power	< 3 s duration	23 dBm (= 200 mW)
Max. pulse voltage		50 V
Max. pulse energy	pulse width 10 μ s	1 mWs
Intermodulation		
Third-order intermodulation (TOI), nominal values	intermodulation-free dynamic range, signal level 2×-20 dBm, RF attenuation = 0 dB, without RF preamplifier (R&S®FSC-B22 option) or RF preamplifier = OFF	
	$f_{in} < 300$ MHz	> 54 dBc (TOI > +7 dBm, typ. +11 dBm)
	$300 \text{ MHz} \leq f_{in} < 3.6$ GHz	> 60 dBc (TOI > +10 dBm, typ. +15 dBm)
	$3.6 \text{ GHz} \leq f_{in} \leq 6$ GHz	> 46 dBc (TOI > +3 dBm, typ. +10 dBm)
	signal level 2×-40 dBm, RF attenuation = 0 dB, RF preamplifier (R&S®FSC-B22 option) = ON	
	$f_{in} < 300$ MHz	> 50 dBc (TOI -15 dBm)
	$300 \text{ MHz} \leq f_{in} \leq 6$ GHz	> 56 dBc (TOI -12 dBm)
Second harmonic intercept (SHI), nominal values	RF attenuation = 0 dB, without RF preamplifier (R&S®FSC-B22 option) or RF preamplifier = OFF	
	$f_{in} = 20$ MHz to 1.5 GHz	+40 dBm
	$f_{in} = 1.5$ GHz to 3 GHz	+30 dBm
	RF attenuation 0 dB, RF preamplifier (R&S®FSC-B22 option) = ON	
	$f_{in} = 100$ MHz to 3 GHz	0 dBm
Displayed average noise level	RF attenuation 0 dB, termination 50 Ω , RBW = 100 Hz, VBW = 10 Hz, sample detector, log scaling, tracking generator = OFF, normalized to 1 Hz, without RF preamplifier (R&S®FSC-B22 option) or RF preamplifier = OFF	
	frequency	
	9 kHz to 100 kHz	< -108 dBm, typ. -118 dBm
	100 kHz to 1 MHz	< -115 dBm, typ. -125 dBm
	1 MHz to 10 MHz	< -136 dBm, typ. -144 dBm
	10 MHz to 2 GHz	< -141 dBm, typ. -146 dBm
	2 GHz to 3.6 GHz	< -138 dBm, typ. -143 dBm
	3.6 GHz to 5 GHz	< -142 dBm, typ. -146 dBm
	5 GHz to 6 GHz	< -140 dBm, typ. -144 dBm
	RF attenuation 0 dB, termination 50 Ω , RBW = 100 Hz, VBW = 10 Hz, sample detector, log scaling, tracking generator = OFF, normalized to 1 Hz, RF preamplifier (R&S®FSC-B22 option) = ON	
	frequency	
	100 kHz to 1 MHz	< -133 dBm, typ. -143 dBm
	1 MHz to 10 MHz	< -157 dBm, typ. -161 dBm
	10 MHz to 1 GHz	< -161 dBm, typ. -165 dBm
	1 GHz to 2 GHz	< -159 dBm, typ. -163 dBm
	2 GHz to 5 GHz	< -155 dBm, typ. -159 dBm
	5 GHz to 6 GHz	< -151 dBm, typ. -155 dBm

Immunity to interference, nominal values		
Image frequencies	$f_{in} - 2 \times 21.4 \text{ MHz}$	< -70 dBc, typ. -80 dBc
	$f_{in} - 2 \times 831.4 \text{ MHz}$	< -70 dBc, typ. -90 dBc
	$f_{in} - 2 \times 4881 \text{ MHz}$	-60 dBc
Intermediate frequencies	21.4 MHz, 831.4 MHz, 4881.4 MHz	-60 dBc, typ. -80 dBc
	8931.4 MHz	-50 dBc
Other interfering signals, signal level – RF attenuation < -20 dBm	$f \leq 3.6 \text{ GHz}$ spurious at $f_{in} - 2440.7 \text{ MHz}$	< -60 dBc
	$3.6 \text{ GHz} < f \leq 6 \text{ GHz}$ spurious at $f_{in} - 4465.7 \text{ MHz}$	< -60 dBc
	$f \leq 3.6 \text{ GHz}$	
Other interfering signals, related to local oscillators	$\Delta f < 300 \text{ kHz}$	-60 dBc
	$\Delta f \geq 300 \text{ kHz}$	< -60 dBc
	$f > 3.6 \text{ GHz}$	
	$\Delta f < 300 \text{ kHz}$	-54 dBc
	$\Delta f \geq 300 \text{ kHz}$	< -54 dBc
	$f = \text{receive frequency}$	
Residual spurious response	input matched with 50 Ω , without input signal, RBW $\leq 30 \text{ kHz}$, $f \geq 3 \text{ MHz}$, RF attenuation = 0 dB, tracking generator = OFF	< -90 dBm

Level display		
Logarithmic level axis		1/2/5/10/20/50/100 dB, 10 divisions
Linear level axis		0 % to 100 %, 10 divisions
Number of traces		2
Trace detectors		max peak, min peak, auto peak, sample, RMS
Trace functions		clear/write, max hold, min hold, average, view
Setting range of reference level		-80 dBm to +30 dBm
Units of level axis		dBm, dBmV, dB μ V, V, W

Level measurement uncertainty		
Absolute level uncertainty at 100 MHz	+20 °C to +30 °C	$\pm 0.3 \text{ dB}$ ($\sigma = 0.1 \text{ dB}$)
Frequency response (+20 °C to +30 °C)	$9 \text{ kHz} \leq f < 10 \text{ MHz}$	$\pm 1.5 \text{ dB}$, nominal
	$10 \text{ MHz} \leq f \leq 3.6 \text{ GHz}$	$\pm 1 \text{ dB}$ ($\sigma = 0.33 \text{ dB}$)
	$3.6 \text{ GHz} < f \leq 6 \text{ GHz}$	$\pm 1.5 \text{ dB}$ ($\sigma = 0.5 \text{ dB}$)
Attenuator uncertainty		$\pm 0.3 \text{ dB}$ ($\sigma = 0.1 \text{ dB}$)
Uncertainty of reference level setting		$\pm 0.1 \text{ dB}$, nominal
Display nonlinearity	S/N > 16 dB, 0 dB to -50 dB, logarithmic level display	$\pm 0.2 \text{ dB}$ ($\sigma = 0.067 \text{ dB}$)
Bandwidth switching uncertainty	reference: RBW = 10 kHz	$\pm 0.1 \text{ dB}$, nominal
Total measurement uncertainty	95 % confidence level, +20 °C to +30 °C, S/N > 16 dB, 0 dB to -50 dB below reference level, RF attenuation auto	
	$10 \text{ MHz} < f \leq 3.6 \text{ GHz}$	$\pm 1 \text{ dB}$, typ. $\pm 0.5 \text{ dB}$
	$3.6 \text{ GHz} < f \leq 6 \text{ GHz}$	$\pm 1.5 \text{ dB}$, typ. $\pm 1 \text{ dB}$

Trigger functions

Trigger		
Trigger source		free run, video, external
External trigger level	low $\rightarrow$ high transition	2.4 V, nominal
	high $\rightarrow$ low transition	0.7 V, nominal

Tracking generator (model .13/.16 only)

Frequency range	model .13	100 kHz to 3 GHz
	model .16	100 kHz to 6 GHz
Connector		N female, 50 Ω
VSWR	$100 \text{ kHz} \leq f \leq 1 \text{ GHz}$	< 1.5, nominal
	$1 \text{ GHz} < f \leq 3 \text{ GHz}$	< 2, nominal
	$3 \text{ GHz} < f \leq 6 \text{ GHz}$ (model .16 only)	< 2, nominal
Output level	tracking generator attenuation = 0 dB	0 dBm, nominal
Tracking generator attenuator		0 dB to 40 dB in 1 dB steps
Dynamic range	RF attenuation = 0 dB, tracking generator attenuation = 10 dB, RBW = 1 kHz	
	$100 \text{ kHz} \leq f < 300 \text{ kHz}$	> 60 dB, typ. 80 dB
	$300 \text{ kHz} \leq f < 3 \text{ GHz}$	> 70 dB, typ. 90 dB
	$3 \text{ GHz} \leq f < 6 \text{ GHz}$ (model .16 only)	> 70 dB, typ. 90 dB
Reverse power		
DC voltage		50 V
CW RF power		+20 dBm (= 0.1 W)
Max. pulse voltage		50 V
Max. pulse energy (10 μ s)		1 mWs

Inputs and outputs

RF input		
Impedance		50 Ω
Connector		N female
VSWR	$100 \text{ kHz} \leq f \leq 1 \text{ GHz}$	< 1.5, nominal
	$1 \text{ GHz} < f \leq 6 \text{ GHz}$	< 2, nominal
Setting range of input attenuator		0 dB to 40 dB in 5 dB steps
RF preamplifier gain	with R&S®FSC-B22 option	20 dB, nominal
AF output		
AF demodulation types		AM and FM
Connector		3.5 mm mini jack
Output impedance		32 Ω , nominal
Voltage (open circuit)		V_{RMS} adjustable from 0 V to > 100 mV
USB interface		
Front panel		USB host interface, version 1.1
Connector		USB type A plug, version 1.1
Memory sticks supported		≤ 4 Gbyte, USB version 1.1 or 2.0
Rear panel		USB device interface, version 1.1
Connector		USB type B plug, version 1.1
External reference, external trigger		
Connector		BNC female, 50 Ω
Mode	selectable	external reference, external trigger
External reference input	required level	0 dBm
	frequency	10 MHz
External trigger threshold	low $\rightarrow$ high transition	2.4 V, nominal
	high $\rightarrow$ low transition	0.7 V, nominal
IF out		
Connector		BNC female, 50 Ω
Frequency		21.4 MHz
DC supply input		
Connector		5 mm DIN 45323 female
Input voltage range		14 V to 16 V, nominal
Input current		0.9 A to 0.7 A

General data

Power supply		
AC supply	input specifications	100 V AC to 240 V AC, 50 Hz to 60 Hz, 400 Hz, 130 VA
DC supply	input specifications	14 V to 16 V, 0.9 A to 0.7 A, nominal
Power consumption		12 W, nominal
Safety		in line with IEC 61010-1, EN 61010-1, CAN/CSA C22.2 No. 61010-1-04, UL61010-1
Test mark		VDE - GS, cCSA _{US}

Manual operation		
Languages		Chinese, English, French, German, Italian, Hungarian, Japanese, Korean, Portuguese, Russian, Spanish
Remote control		
Command set		SCPI 1997.0
LAN interface		10/100BaseT, RJ-45
USB interface	rear panel	USB device, type B
Display		
Type		14.5 cm (5,7") LCD TFT color
Resolution		640 × 480 pixel
Audio		
Speaker		internal
Mass memory		
Mass memory		flash memory (internal) USB memory stick (not supplied)
Data storage	internal	> 256 instrument settings and traces
	external, on 1 Gbyte USB memory stick	> 5000 instrument settings and traces
Temperature	operating temperature range	+0 °C to +50 °C
	permissible temperature range	+0 °C to +55 °C
	storage temperature range	-40 °C to +70 °C
Climatic loading	relative humidity	+25/+40 °C at 85 % relative humidity (IEC 60068-2-30)
Mechanical resistance		
Vibration	sinusoidal	IEC 60068-2-6
	random	IEC 60068-2-64
Shock		40 g shock spectrum, in line with MIL-STD-810E, method 516.4 procedure 1, IEC 60068-2-27
EMC		in line with EMC Directive 2004/108/EC including: IEC/EN 61326-1 ^{1, 2} , IEC/EN 61326-2-1, CISPR 11/EN 55011 ¹ IEC/EN 61000-3-2, IEC/EN 61000-3-3

Weight and dimensions		
Dimensions	W × H × D	233 mm × 158.1 mm × 350 mm (9.2 in × 6.2 in × 13.8 in)
Weight		4.5 kg (9.9 lb)

Recommended calibration interval		1 year
---	--	--------

¹ RF emission in line with EN 55011 class A, operation in residential, commercial and business areas or in small-size companies is not covered. Thus, the instrument may not be operated in residential, commercial and business areas or in small-size companies, unless additional measures are taken to ensure that EN 55011 class B is complied with.

² Immunity test requirement for industrial environment (EN 61326 table 2).

Ordering information

Designation	Type	Order No.
Spectrum Analyzer, 9 kHz to 3 GHz	R&S®FSC3	1314.3006.03
Spectrum Analyzer, 9 kHz to 3 GHz, with tracking generator	R&S®FSC3	1314.3006.13
Spectrum Analyzer, 9 kHz to 6 GHz	R&S®FSC6	1314.3006.06
Spectrum Analyzer, 9 kHz to 6 GHz, with tracking generator	R&S®FSC6	1314.3006.16
Accessories supplied		
Power cable, USB cable for connection to PC, quick start guide and CD-ROM (with operating manual and service manual)		

Options

Designation	Type	Order No.
Preamplifier, 100 kHz to 3 GHz/6 GHz (for the R&S®FSC3/6)	R&S®FSC-B22	1314.3535.02

Recommended extras

Designation	Type	Order No.
Ethernet Cable	R&S®HA-Z210	1309.6152.00
Headphones	R&S®FSH-Z36	1145.5838.02
19" Rack Adapter for installing two R&S®FSC	R&S®ZZA-T33	1109.4458.00
19" Rack Adapter for installing one R&S®FSC	R&S®ZZA-T34	1109.4464.00
Matching pad 50/75 Ω , 0 Hz to 2700 MHz, matching at both ends, N-connectors	R&S®RAM	0358.5414.02
Matching pad 50/75 Ω , 0 Hz to 2700 MHz, matching at one end, N-connectors	R&S®RAZ	0358.5714.02
75 ohm matching pad N to BNC (female)	R&S®FSH-Z38	1300.7740.02
Near-Field Probe Set	R&S®HZ-15	1147.2736.02
Preamplifier for R&S®HZ-15	R&S®HZ-16	1147.2720.02

Supported Power Sensors ³

Designation	Type	Order No.
Universal Power Sensor, 10 MHz to 8 GHz, 100 mW, 2-path	R&S®NRP-Z211	1417.0409.02
Universal Power Sensor, 10 MHz to 18 GHz, 100 mW, 2-path	R&S®NRP-Z221	1417.0309.02
R&S®NRP-Zxx power sensors require the following adapter cable for operation on the R&S®FSC		
USB Adapter Cable (passive), length: 2 m (78.7 in), to connect R&S®NRP-Zxx S/SN power sensors to the R&S®Spectrum Rider	R&S®NRP-Z4	1146.8001.02

Warranty		
Base unit		3 years
All other items ⁴		1 year
Options		
Extended Warranty, one year	R&S®WE1	Please contact your local Rohde & Schwarz sales office.
Extended Warranty, two years	R&S®WE2	
Extended Warranty with Calibration Coverage, one year	R&S®CW1	
Extended Warranty with Calibration Coverage, two years	R&S®CW2	

Extended warranty with a term of one and two years (WE1 and WE2)

Repairs carried out during the contract term are free of charge ⁵. Necessary calibration and adjustments carried out during repairs are also covered.

Extended warranty with calibration coverage (CW1 and CW2)

Enhance your extended warranty by adding calibration coverage at a package price. This package ensures that your Rohde & Schwarz product is regularly calibrated, inspected and maintained during the term of the contract. It includes all repairs ⁵ and calibration at the recommended intervals as well as any calibration carried out during repairs or option upgrades.

³ For average power measurement only.

⁴ For options that are installed, the remaining base unit warranty applies if longer than 1 year. Exception: all batteries have a 1 year warranty. ⁵ Excluding defects caused by incorrect operation or handling and force majeure. Wear-and-tear parts are not included.