


setup display (4,3")  
battery pack or  
shielded power supply  
(standard 230V, 110V  
available too)  
for wall mount application


dAV- camera SD, HD,  
mini-HD or μ

pan-/tilt unit\*  
(optional)

PT-02: wall / ceiling mount  
PT-03: mobile use on monopod or tripod

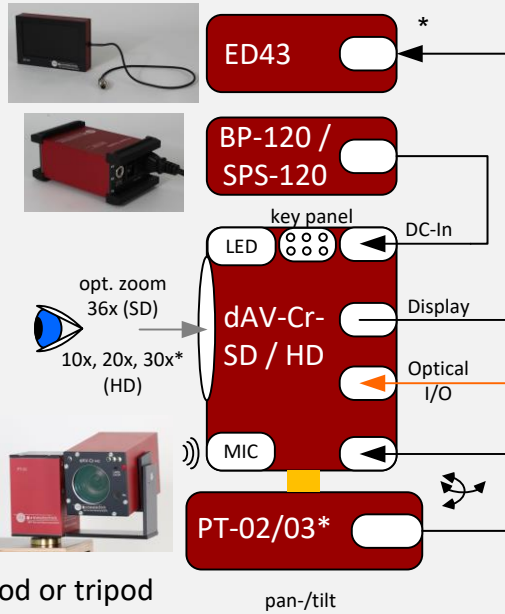



opt. zoom  
36x (SD)  
10x, 20x, 30x\*  
(HD)



wall mount WCM40  
optional TRX  
platform




mk monopod  
optional ball casters



Integrate frequency, field strength,  
DUT name, Date, Time

Time: 14:53:10  
U 1

video, audio  
and remote  
over one  
fiber

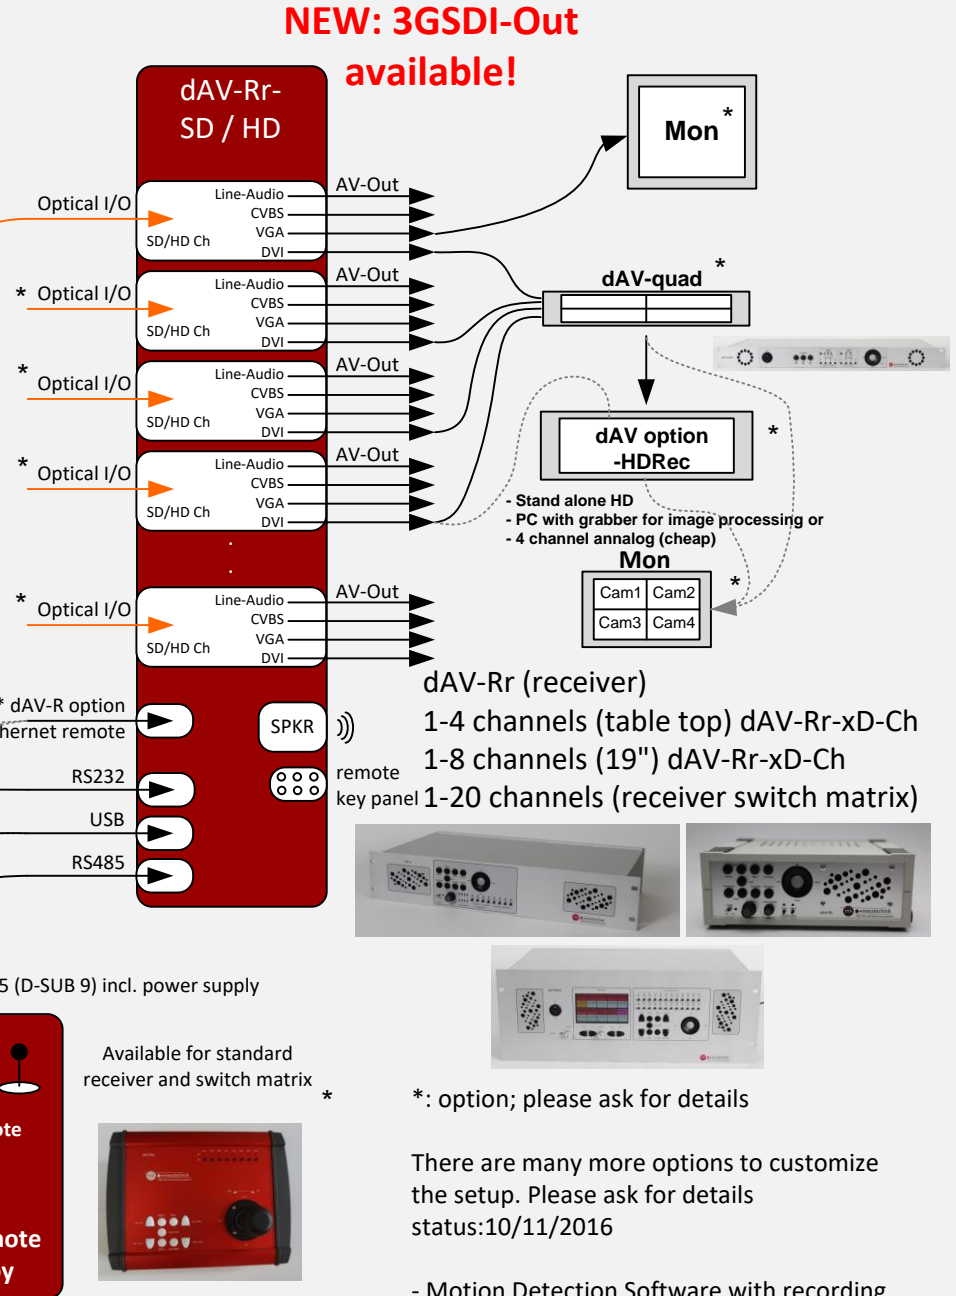

\*: option; please ask for details

There are many more options to customize  
the setup. Please ask for details  
status:10/11/2016

- Motion Detection Software with recording  
- Water resistant camera and pan/tilt for OATS