

# VBA250-400

10kHz - 250MHz 400W Amplifier


- Rugged push-pull MOSFET technology
- Class A for maximum mismatch drive
- General linear power requirement

The **VBA250-400** is a member of our family of 10kHz-250MHz high power amplifiers, designed primarily for EMC applications.

Like all our products of the VBA250 series, it is based on rugged push-pull MOSFET technology, for extra even order harmonic suppression. The amplifier operates in class A, the benefits for EMC applications being very low distortion and tolerance of 100% mismatch. Fold-back protection is neither fitted nor needed! This makes it supremely suited for very demanding transducer requirements.



## Performance Chart

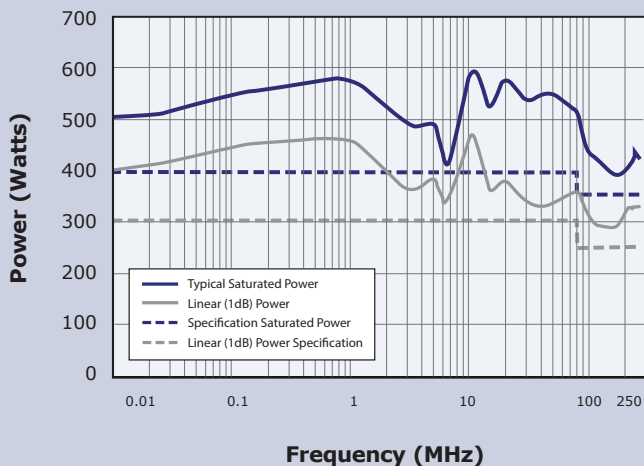

Choose Vectawave for high efficiency and performance in your regular power amplifier requirements.

**See overleaf for technical specification**

**Electrical**

<b>Frequency Range (Instantaneous)</b>	10kHz-250MHz
<b>Rated Output Power</b>	10kHz-80MHz 400W Min 80-250MHz 360W Min
<b>Output Power at 1dB Gain Compression</b>	10kHz-80MHz 300W Min 80-250MHz 250W Min
<b>Gain</b>	56dB Min
<b>Third Order Intercept Point (see note 1)</b>	66dBm
<b>Gain variation with Frequency</b>	±2dB
<b>Harmonics at 250W Output Power</b>	Better than -20dBc
<b>Output Impedance</b>	50 Ohms
<b>Stability</b>	Unconditional
<b>Output VSWR Tolerance (see note 2)</b>	Infinity:1
<b>Input VSWR</b>	2:1 (Max)
<b>Supply Voltage</b>	100-240V ac (+/- 10%)
<b>Supply Frequency Range</b>	45-63Hz
<b>Supply Power</b>	<1.5kVA (Max)
<b>Mains Connector</b>	IEC320

**Mechanical**

<b>RF Connector Style</b>	Type N Female
<b>Safety Interlock</b>	2 x BNC, S/C and O/C to Mute
<b>USB/GPIB Interface</b>	Standard (including forward and reflected power indication)
<b>Dimensions</b>	19 inch, 4U Case, 650mm Deep
<b>Mass</b>	33kg
<b>Operating Temperature Range</b>	0-40°C
<b>Case Style Options</b>	Rack mount with front or rear panel connectors

**Regulatory Compliance**

<b>Conducted and Radiated Emissions</b>	EN61326 Class A
<b>Conducted and Radiated Immunity</b>	EN61326:1997 Table 1
<b>Safety</b>	EN61010-1

**Notes**

- 1 The third order intercept point is a nominal value, as its calculation depends upon the power level at which distortion measurements are made.
- 2 Output VSWR tolerance is specified for excitation within the permitted levels and frequency range



Официальный представитель в России



www.cdip.ru

Тел: +7 (495) 956-20-22

E-mail: info@cdip.ru

**Vectawave**  
Technology Limited

Designers and Manufacturers of Solid State RF and Microwave Amplifiers