VBA400-150

10kHz- 400MHz 150W Amplifier

- Rugged push-pull MOSFET technology
- Class A for maximum mismatch drive
- General linear power requirements

The **VBA400-150** is a member of our family of 10kHz-400MHz high power amplifiers, designed primarily for EMC applications.


Like all our products of the VBA400 series, it is based on rugged push-pull MOSFET technology, for extra even order harmonic suppression.



ectawave

Technology Limited

The amplifier operates in class A, the benefits for EMC applications being very low distortion and tolerance of 100% mismatch. Fold-back protection is neither fitted nor needed! This makes it supremely suited for very demanding transducer requirements.

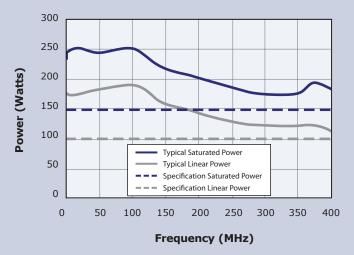

Choose **Vectawave** for high efficiency and performance in your regular power amplifier requirements.

See overleaf for technical specification

Performance Chart

Specifications

VBA400-150

Electrica

Rated Output Power150W MinOutput Power at 1dB Gain Compression100W Min (>150W typical below 100MHz)Gain52dB MinThird Order Intercept Point (see note 1)61dBmGain variation with Frequency±2.5dBHarmonics at 75W Output PowerBetter than -20dBcOutput Impedance50 OhmsStabilityUnconditionalOutput VSWR Tolerance (see note 2)Infinity:1
Gain52dB MinThird Order Intercept Point (see note 1)61dBmGain variation with Frequency±2.5dBHarmonics at 75W Output PowerBetter than -20dBcOutput Impedance50 OhmsStabilityUnconditionalOutput VSWR Tolerance (see note 2)Infinity:1
Third Order Intercept Point (see note 1)61dBmGain variation with Frequency±2.5dBHarmonics at 75W Output PowerBetter than -20dBcOutput Impedance50 OhmsStabilityUnconditionalOutput VSWR Tolerance (see note 2)Infinity:1
Gain variation with Frequency±2.5dBHarmonics at 75W Output PowerBetter than -20dBcOutput Impedance50 OhmsStabilityUnconditionalOutput VSWR Tolerance (see note 2)Infinity:1
Harmonics at 75W Output PowerBetter than -20dBcOutput Impedance50 OhmsStabilityUnconditionalOutput VSWR Tolerance (see note 2)Infinity:1
Output Impedance50 OhmsStabilityUnconditionalOutput VSWR Tolerance (see note 2)Infinity:1
StabilityUnconditionalOutput VSWR Tolerance (see note 2)Infinity:1
Output VSWR Tolerance (see note 2) Infinity:1
Input VSWR 2:1 (Max)
Supply Voltage 100 - 240V ac (+/- 10%)
Supply Frequency Range 45-63Hz
Supply Power<1kVA (Max)
Mains Connector IEC 320

Mechanical

RF Connector Style	Type N Female
Safety Interlock	Dual input, S/C and/or O/C to Mute
USB/GPIB Interface	Optional
Dimensions	19 inch, 4U Case, 500mm Deep
Mass	18kg
Operating Temperature Range	0-40°C
Case Style Options	Rack mount with Front or Rear panel connectors
	Bench mount with Front panel connectors

Regulatory Compliance

Conducted and Radiated Emissions	EN61326 Class A
Conducted and Radiated Immunity	EN61326:1997 Table 1
Safety	EN61010-1

Notes

- 1 The third order intercept point is a nominal value, as its calculation depends upon the power level at which distortion measurements are made.
- 2 Output VSWR tolerance is specified for excitation within the permitted levels and frequency range



Официальный представитель в России





Designers and Manufacturers of Solid State RF and Microwave Amplifiers