

VBA250-120

10kHz - 250MHz 120W Amplifier

- Rugged push-pull MOSFET technology
- Class A for maximum mismatch drive
- General linear power requirements




The **VBA250-120** is a member of our family of 10kHz-250MHz high power amplifiers, designed primarily for EMC applications.

This amplifier is based on rugged push-pull MOSFET technology, for extra even order harmonic suppression.

The amplifier operates in class A, the benefits for EMC applications being very low distortion and tolerance of 100% mismatch. Fold-back protection is neither fitted nor needed! This makes it supremely suited for very demanding transducer requirements.

Performance Chart

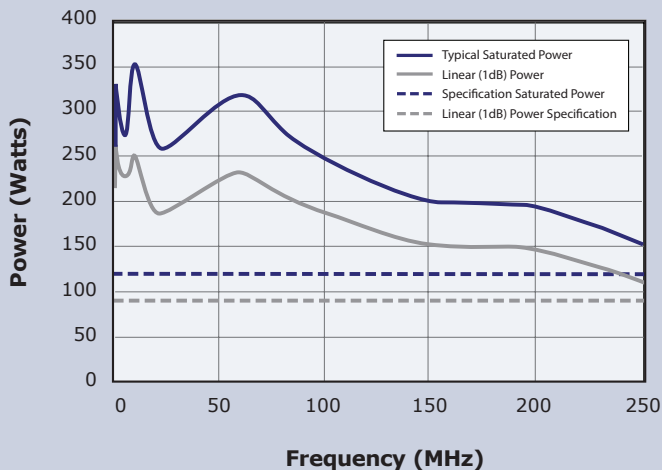

Choose Vectawave for high efficiency and performance in your regular power amplifier requirements.

See overleaf for technical specification

Electrical

Frequency Range (Instantaneous)	10kHz-250MHz
Rated Output Power	120W Min
Output Power at 1dB Gain Compression	90W Min (>120W typical below 100MHz)
Gain	51dB Min
Third Order Intercept Point (see note 1)	61dBm
Gain variation with Frequency	±2dB
Harmonics at 80W Output Power	Better than -20dBc
Output Impedance	50 Ohms
Stability	Unconditional
Output VSWR Tolerance (see note 2)	Infinity:1
Input VSWR	2:1 (Max)
Supply Voltage	100 - 240V ac (+/- 10%)
Supply Frequency Range	45-63Hz
Supply Power	<1kVA (Max)
Mains Connector	IEC 320

Mechanical

RF Connector Style	Type N Female
Safety Interlock	Dual input, S/C and/or O/C to Mute
USB/GPIB Interface	Optional
Dimensions	19 inch, 4U Case, 500mm deep
Mass	18kg
Operating Temperature Range	0-40°C
Case Style Options	Rack mount with Front or Rear panel connectors Bench mount with Front panel connectors

Regulatory Compliance

Conducted and Radiated Emissions	EN61326 Class A
Conducted and Radiated Immunity	EN61326:1997 Table 1
Safety	EN61010-1

Notes

- 1 The third order intercept point is a nominal value, as its calculation depends upon the power level at which distortion measurements are made.
- 2 Output VSWR tolerance is specified for excitation within the permitted levels and frequency range



Официальный представитель в России



www.cdip.ru

Тел: +7 (495) 956-20-22

E-mail: info@cdip.ru

Vectawave
Technology Limited

Designers and Manufacturers of Solid State RF and Microwave Amplifiers